

LOCKEY PANIC BARS

Grade 1 Certified ANSI/BHMA A156.3 Series
Complies with ANSI A117.a ADA requirements
UL/cUL Listed

Narrow Stile: 2 1/2"

Door Thickness: 1 3/4" (standard)

Device Length: 33" for 36" doors or 42" for 48" doors

Can be cut down to 27"

Weather Resistant

36" Doors

PB1100 AL


PB1100 SS

PB1100 FR

48" Doors

PB1142

PB1142 SS

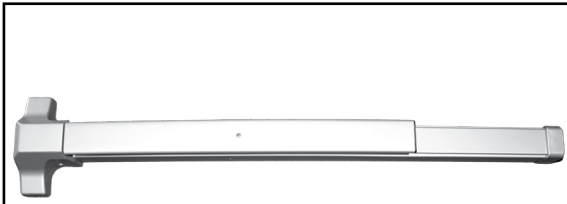

Available LOCKEY Panic Bars:

Standard: PB1100

Aluminum: PB1100 AL

Stainless Steel: PB1100 SS

Fire Rated: PB1100 FR

For 48" Doors: PB1142

Stainless Steel, for 48" Doors: PB1142 SS

PB2500 PANIC BARS

UL Certified ANSI/BHMA 156.3 2008, Grade 1
Listed by CA State Fire Marshall & ADA Compliant
Made in the USA


Weather Resistant

Non-handed

Standard lengths for 36" or 48" doors/gates

Can be field cut for undersized doors/gates

Designed for narrow stile aluminum doors

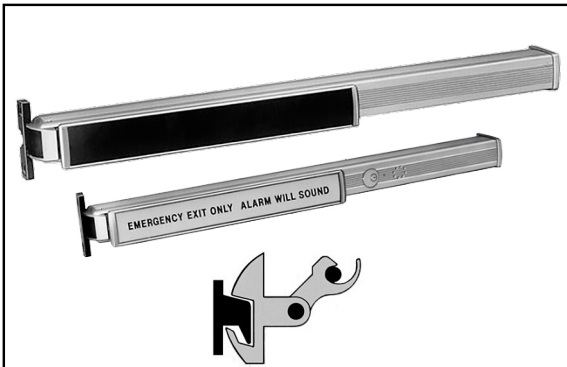

The PB2500 and PB2500 Alarm Bar

have a patented double-interlocking system, making it virtually impossible to tamper with, pry, or force open.

36" Doors

PB2500

PB2500 Alarm

48" Doors

PB2542

PB2542 Alarm

DETEX PANIC BARS

ANSI and BHMA Grade 1 Certified

UL/cUL Listed

ADA Compliant

Narrow Stile: 2 1/2"

Door Thickness: 1 3/4" (standard)

Device Length: 33" for 36" doors or 42" for 48" doors

Field-sizable

Weatherproof



Available DETEX Panic Bars:

Detex V-40

Detex Alarm Bar: V-40xEB

Detex Weatherized Alarm Bar: V-40xEBxW

Order

V-40

V-40xEB

V-40xEBxW

Black

711

48" Doors

48