LOCKEY USA

2018 PRODUCT CATALOG

TABLE OF CONTENTS

To find an authorized **Lockey USA** distributor or to inquire about becoming a Lockey distributor, visit **LockeyUSA.com/distributors**

To request additional copies of this **Lockey USA** Product Catalog, visit **LockeyUSA.com/product-catalog**

Find installation, programming and user instructions online at **LockeyUSA.com/instructions**

Lockey USA product warranty statements are available at **LockeyUSA.com/warranty.** Please note the product warranty does not cover the finish.

DC
Many of our products are available in Double Combination (DC). DC locks have a combination body on both the interior and exterior. DC locks require a code to unlock from both the interior and exterior.

KO
Many of our products are available in Key Override (KO). For warranty information, visit **LockeyUSA.com.**
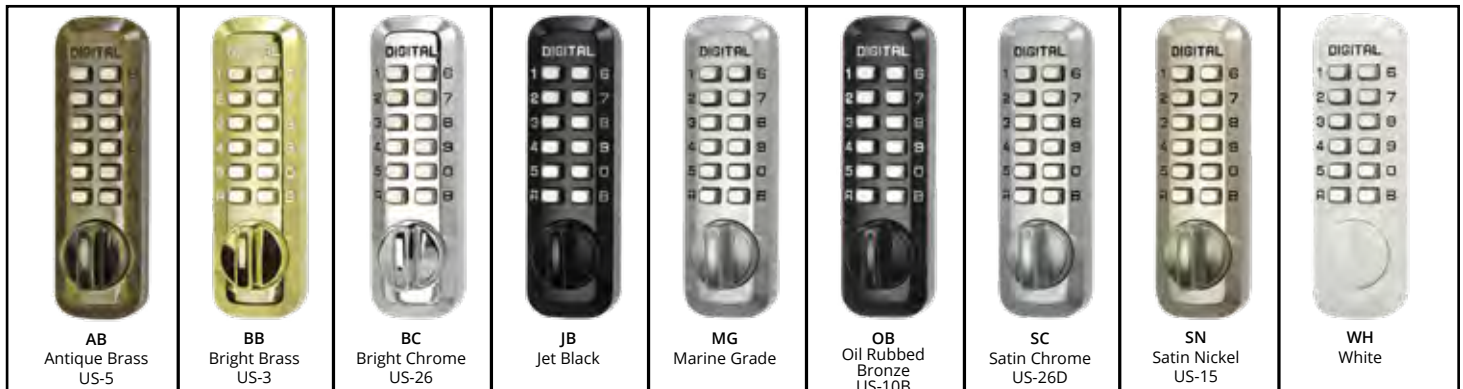
KOS
Locks with **x*** under **KO available** are compatible with the add-on Key Override System (KOS), which is sold separately.

MG
Many products are offered in the Marine Grade (MG) finish, which is designed to extend the life of the finish when exposed to corrosive elements of saltwater environments. The Marine Grade finish closely resembles the Satin Chrome finish.

For more detailed information on Lockey USA products, contact your sales representative.

AB Antique Brass US-5

BB Bright Brass US-3

BC Bright Chrome US-26

JB Jet Black

MG Marine Grade

OB Oil Rubbed Bronze US-10B

SC Satin Chrome US-26D

SN Satin Nickel US-15

WH White

FEATURES

Public, Private & Remote Allocation System (RAS) mode
Key override
Up to 80,000 cycles per pair of AA batteries
Batteries included
Battery condition indicator
Audible keypad (can be turned on/off)
8 digit master code
6 digit sub-master code
4 digit user codes
6 digit technician code
Auto unlock mode (can be turned on/off)

OPTIONS

Finishes: Black (B), Silver (S), White (W), Custom*
Keypad Direction: Vertical (V), Right (R), Left (L)
Push to Lock SLAM Latch (3)
Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
    Length: 136mm (5.35")
    Width: 37mm (1.46")
    Depth: 27mm (1.06")
Mounting Hole Shape: 2 or 3 point mounting
Spindle Length: 20mm standard, 24mm by special order*
Power: 2 x AA Battery (Alkaline)
Operations: Up to 80,000 cycles per pair of AA batteries
Low Battery: LED lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Standard Cam Capability: 1/4" to 1 1/2"
Keys Included: 2
For Internal Use
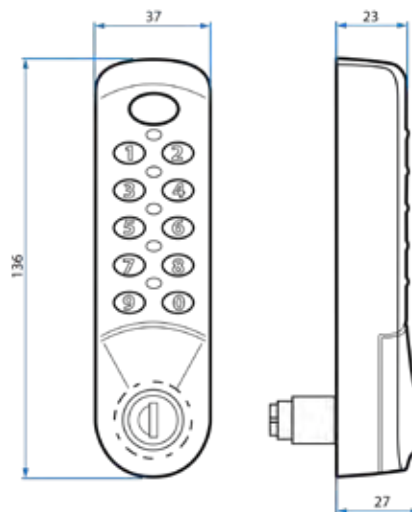
Optional
SLAM Latch (3):

ORDERING INFORMATION

Order # for EC780 shown above is EC780SV

Order #	Finish	Keypad Direction	SLAM Latch	RAS
EC780	(B) Black	(V) Vertical	3	RAS
	(S) Silver	(R) Right		
	(W) White	(L) Left		

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Suitable for chlorinated environments
Public, Private & Remote Allocation System (RAS) mode
Key override
Up to 80,000 cycles per pair of AA batteries
Batteries included
Battery condition indicator
Audible keypad (can be turned on/off)
8 digit master code
6 digit sub-master code
4 digit user codes
6 digit technician code
Auto unlock mode (can be turned on/off)
Technician mode

OPTIONS

Finishes: Black (B), Silver (S), White (W), Custom*
Keypad Direction: Vertical (V), Right (R), Left (L)
ADA Wet Area Kit (A)
Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
    Length: 140mm (5 1/2")
    Width: 41mm (1.61")
    Depth: 32.5mm (1.28")
Mounting Hole Shape: 2 or 3 point mounting (see technical drawing)
Spindle Length: 16mm standard, 20mm by special order*
Power: 2 x AA Battery (Alkaline)
Operations: Up to 80,000 cycles per pair of AA batteries
**Low Battery:** LED lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Standard Cam Capability: 1/4" to 1 1/2"
Keys Included: 2
IP65 Rated
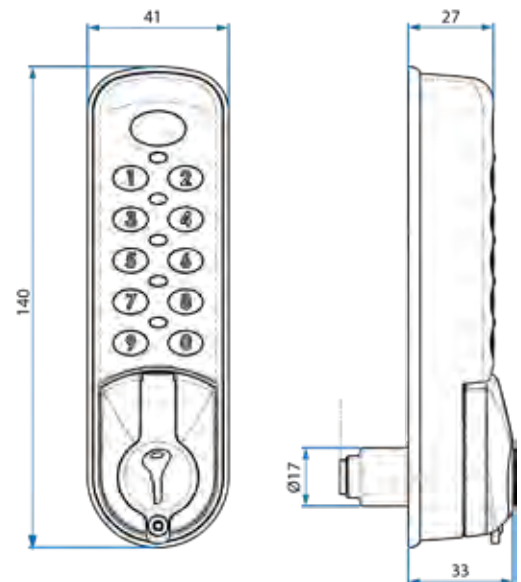
ORDERING INFORMATION

Order # for EC781 shown above is EC781BV

Order #	Finish	Keypad Direction	ADA Kit	RAS
EC781	(B) Black	(V) Vertical	A	RAS
	(S) Silver	(R) Right		
	(W) White	(L) Left		
	Custom*			

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

ADA Lever Handle
Public, Private & Remote Allocation System (RAS) mode
Key override
Up to 80,000 cycles per pair of batteries
Batteries included
Battery condition indicator
Audible keypad (can be turned on/off)
8 digit master code
6 digit sub-master code
4 digit user codes
6 digit technician code
Auto unlock mode (can be turned on/off)
Technician mode

OPTIONS

Finishes: Black (B), Silver (S), White (W), Custom*
Keypad Direction: Vertical (V), Right (R), Left (L)
Push to Lock SLAM Latch (3)
Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
    Length: 185.5mm (7.3")
    Width: 37mm (1.46")
    Depth: 28.7mm (1.13")
Mounting Hole Shape: 2 or 3 point mounting (see technical drawing)
Spindle Length: 20mm standard, 24mm by special order*
Power: 2 x AA Battery (Alkaline)
Operations: Up to 80,000 cycles per pair of AA batteries
**Low Battery:** LED lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Standard Cam Capability: 1/4" to 1 1/2"
Keys Included: 2
For Internal use
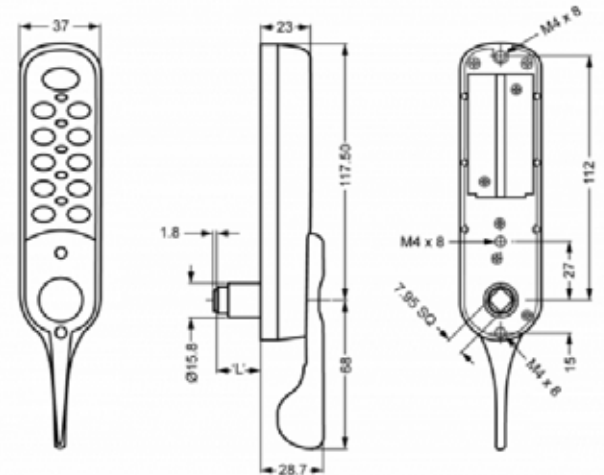
ORDERING INFORMATION

Order # for EC782 shown above is EC782SV

Order #	Finish	Keypad Direction	SLAM Latch	RAS
EC782	(B) Black	(V) Vertical	3	RAS
	(S) Silver	(R) Right		
	Custom*	(L) Left		

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

RFID: Can be paired with existing MIFARE/NFC 13.56MHz systems or used separately
Public and Private user modes
Key override
Up to 80,000 cycles per pair of AA batteries
Batteries included
Battery condition indicator
Audible actuation (can be turned on/off)

PROGRAMMING OPTIONS

Change master card, add user card, delete all user cards, delete single user card (with & without user card), set private mode & public mode, set audio, auto unlock, set read speed mode.

ORDERING OPTIONS

Finishes: Black (B), Silver (S), Custom*
Push to Lock SLAM Latch (3)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
Length: 136mm (5.35")
Width: 37mm (1.46")
Depth: 30mm (1.18")
Mounting Hole Shape: 2 or 3 point mounting
Spindle Length: 20mm standard, 24mm by special order*
Power: 2 x AA Battery (Alkaline)
**Low Battery:** LED lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Standard Cam Capability: 1/4" to 1 1/2"
Keys Included: 2
For Internal Use
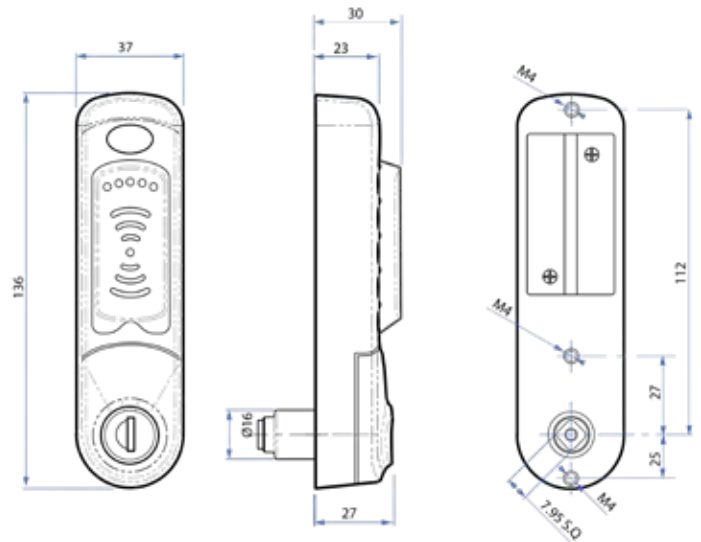
ORDERING INFORMATION

Order # for EC783 shown above is EC783B

Order #	Finish	SLAM Latch
EC783	(B) Black	3
	(S) Silver	
	Custom*	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Public, Private & Remote Allocation System (RAS) mode
Key override
Up to 80,000 cycles per pair of AA batteries
Batteries included
Battery condition indicator
Audible keypad (can be turned on/off)
8 digit master code
6 digit sub-master code
4 digit user codes
6 digit technician code
Auto unlock mode (can be turned on/off)

OPTIONS

Finishes: Black (B), Silver (S), Custom*
Keypad Direction: Vertical (V), Right (R), Left (L)
Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
Length: 143.5mm (5.65")
Width: 41mm (1.61")
Depth: 11.5mm (.45")
Internal Dimensions:
Length: 142mm (5.6")
Width: 42.6mm (1.68")
Depth: 37.5mm (1.48")
Mounting Hole Shape: 3 point mounting (see technical drawing)
Spindle Length: 20mm standard, 24mm by special order*
Power: 2 x AA Battery (Alkaline)
**Low Battery:** LED lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Keys Included: 2
For Internal Use
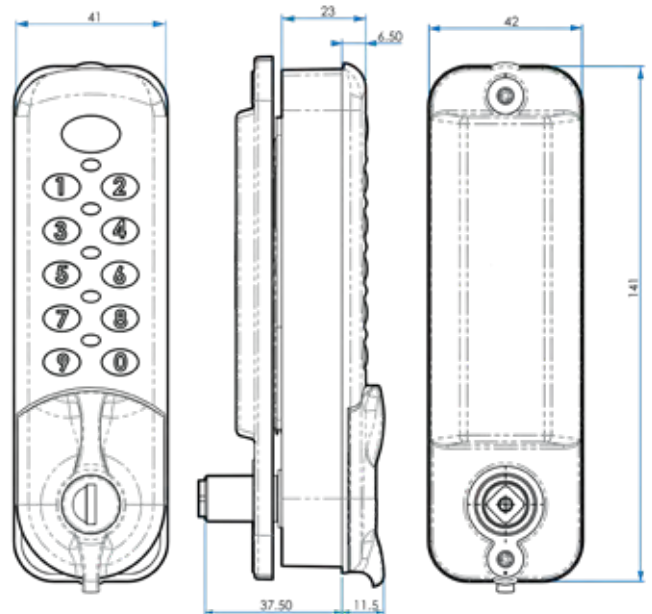
ORDERING INFORMATION

Order # for EC784 shown above is EC784BV

Order #	Finish	Keypad Direction	RAS
EC784	(B) Black	(V) Vertical	RAS
	(S) Silver	(R) Right	
	Custom*	(L) Left	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

RFID: Can be paired with existing MIFARE/NFC 13.56MHz systems or used separately
Flush fit
Public or private user modes
Key override
Up to 80,000 cycles per pair of AA batteries
Batteries included
Battery condition indicator
Audible actuation

PROGRAMMING OPTIONS

Change master card, add user card, delete all user cards, delete single user card (with & without user card), set private mode & public mode, set audio, auto unlock, set read speed mode.

ORDERING OPTIONS

Finishes: Silver (S), Black (B), Custom*

DIMENSIONS & SPECIFICATIONS

External Dimensions:
Length: 143.5mm (5.65")
Width: 41mm (1.61")
Depth: 13.5mm (.53")
Internal Dimensions:
Length: 141.6mm (5.57")
Width: 42.6mm (1.68")
Depth: 37.5mm (1.48")
Mounting Hole Shape: 3 point mounting
Spindle Length: 20mm standard, 24mm by special order*
Power: 2 x AA Battery (Alkaline)
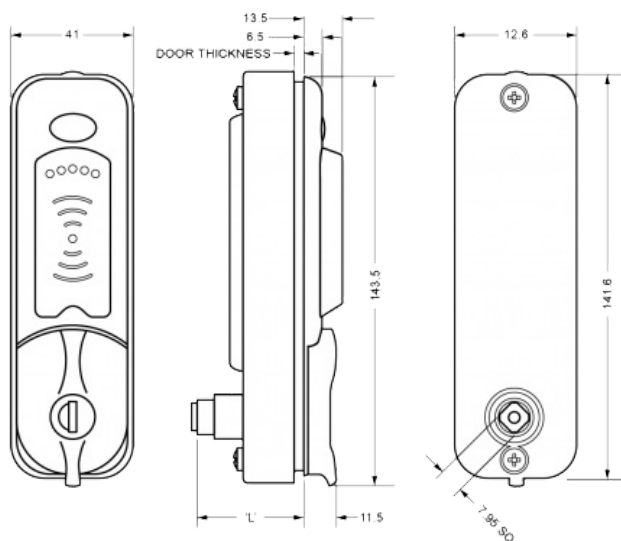**Low Battery:** LED indicator lights with battery condition indicator
Material: Zinc diecast
Finish: Powder coated
Keys Included: 2
For Internal Use

ORDERING INFORMATION

Order # for EC785 shown above is EC785S

Order #	Finish
EC785	(B) Black
	(S) Silver
	Custom*

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Public, Private & Remote Allocation System (RAS) mode
Fits most standard metal lockers "out of the box"
Simple click together fit, with 2 nuts to secure
Designed to work with locking bar lifter
ADA compliant as standard
Key override
Up to 80,000 operations per pair of batteries (included)
Battery condition indicator
Audible key press (can be turned on/off)
Re-lock indicator
4 digit user code (can be set by user)
8 digit master code
6 digit technician code

OPTIONS

Finishes: Silver (S), Black (B), Custom*
Remote Allocation System (RAS)

DIMENSIONS & SPECIFICATIONS

External Dimensions:
    Length: 73.5mm (2.9")
    Width: 52mm (2.05")
    Depth: 28mm (1.1")
Internal Dimensions:
    Length: 67.5mm (2.66")
    Width: 93mm (3.66")
    Depth: 22.4mm (.88")
Power: 2 x AA Battery (Alkaline)
Operations: Up to 80,000 cycles per pair of AA batteries
Low Battery: LED indicator lights with battery condition indicator
Material: Heavy duty zinc die-cast construction
Finish: Powder coated
Keys Included: 2
For Internal Use
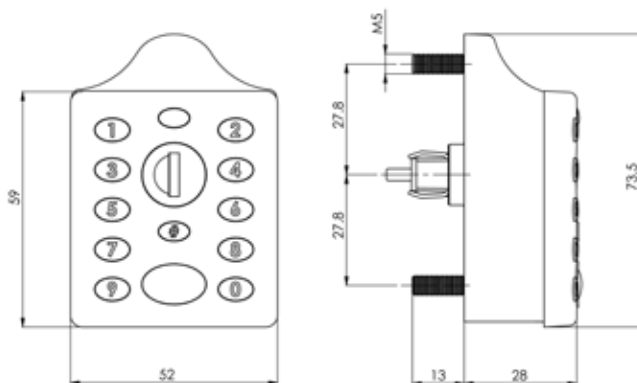
ORDERING INFORMATION

Order # for EC790 shown above is EC790S

Order #	Finish	RAS
EC790	(B) Black	RAS
	(S) Silver	
	Custom*	

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

EC SERIES USER MODES: PUBLIC, PRIVATE, & RAS

Locks in the **Electronic Cabinet and Locker Lock Series** are available in three user modes: Public, Private, and Remote Allocation System mode (RAS).

PUBLIC MODE
User code is lost when opened.

Commonly used for locks on shared spaces such as in fitness locker rooms, shared work spaces, festivals and amusement parks.

TO SET IN PUBLIC MODE:
[LOGO] [MASTER CODE] [08]

TO LOCK:
1. Select the open locker, cabinet or drawer.
2. Place items inside and close the door.
3. Engage lock by turning handle.
4. Enter any four digit code.
5. Re-enter the same four digit code.
6. It is now locked.

TO UNLOCK:
1. Return to the lock.
2. Enter your four digit code on the keypad.
3. Turn handle to disengage.
4. The lock is now unlocked.

PRIVATE MODE
User code is retained when opened.

Commonly used for locks on cabinets, lockers, drawers and other applications in non-shared spaces. The lock is assigned to an individual user.

TO SET IN PRIVATE MODE:
[LOGO] [MASTER CODE] [09] [NEW USER CODE]

TO UNLOCK:
1. Enter assigned four digit code.
2. Turn handle to disengage.
3. Place items inside.

TO LOCK:
1. Close the door.
2. Return handle back to the locked position.

The lock **automatically** relocks after four seconds and engages when the handle is returned back to the locked position.

REMOTE ALLOCATION SYSTEM
User code is managed online.

The Remote Allocation System (RAS) is an online code management system available on all keypad locks in the Electronic Cabinet & Locker Series. With RAS, administrators can remotely manage all locks without ever having to go to the lock itself!

Through the online portal, administrators can view a detailed overview of all the locks they currently manage. The lock list provides information such as the serial number, location of the lock and who the lock is currently allocated to.

> **Change many or all lock codes at once!**
> **1. Select locks to be updated.**
> **2. Click "Manage."**
> **3. Click "Advance lock codes."**
> **The next user code is now available!**

Administrators can manage a single lock by clicking "Update," which can be found on the far left side of the lock list. This will allow the administrator to see all details of the lock.

From the lock details page, administrators can manage, amend and update all aspects of the individual lock.

Administrators can advance the lock code, reallocate the lock to a different user, and edit all aspects of the lock details with the **Remote Allocation System.**

FEATURES

Electronic cam lock
Public and private user modes
Can be flush fitted or surface mounted
Emergency Key Override (7 Disc Barrel)
LED Indicator Lights
10 Button Keypad:
> 8-digit master code
> 6-digit sub-master code
> 4-digit user code

Technician Mode
Secured with 2 x M4 Pan Head Screws

OPTIONS

Finishes:	Keypad Direction:
Black (B)	Vertical (V)
Silver (S)	Right Handed Horizontal (R)
White (W)	Left Handed Horizontal (L)*
Custom*	

DIMENSIONS & SPECIFICATIONS

Dimensions:
> Body Length: 94mm (3.7")
> Head Depth: 32mm (1 1/4")

Power: 1/2 AA Battery
Low Battery: LED indicator lights with battery condition indicator
Material: Zinc Alloy and ABS Construction
Finish: Powder coated
Keys Included: 2
For Internal Use

Flush Fit Clamp Box

Surface Mount Sleeve
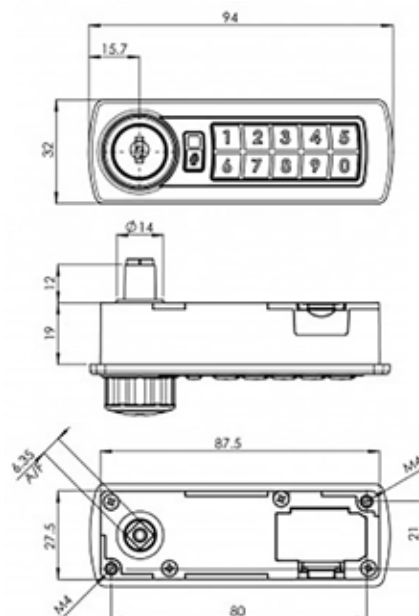
ORDERING INFORMATION

Finish	Vertical	Right
Black	GE370VB	GE370RB
Silver	GE370VS	GE370RS
White	GE370VW	GE370RW

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Electronic/mechanical combination deadbolt
Manual drive deadbolt saves power
Takes place of existing deadbolt
Key override
Backlit keypad
Automatic lock-down on wrong user code entry
Up to 20 user codes
4-10 digit user codes
Low battery alarm
Audible key press
Reversible handing
Clutch function to increase security protection

OPTIONS

Finishes:
Antique Brass
Bright Brass
Oil Rubbed Bronze
Satin Nickel

DIMENSIONS & SPECIFICATIONS

External Dimensions:
Length: 4.05"
Width: 2.67"
Depth: 1.65"
Internal Dimensions:
Length: 3.46"
Width: 2.55"
Depth: 1.22"
Power: 3 x AAA Battery (Alkaline)
Operations: 22,000 cycles
Low Battery: LED indicator lights with battery condition indicator
Material: Zinc alloy, rubber, silicon
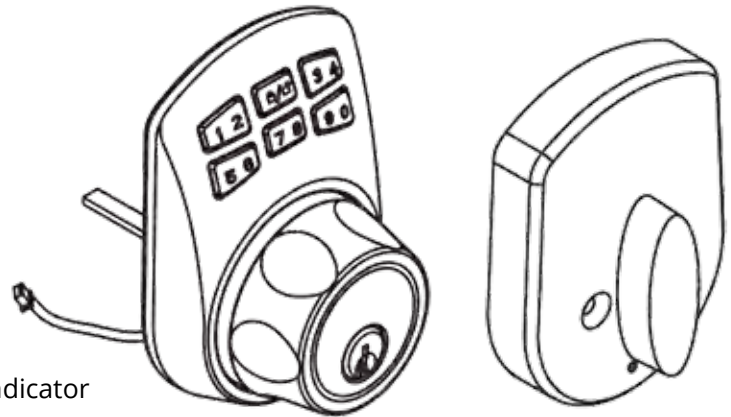**Keyway:** Kwikset
Keys Included: 2
Finish: Powder coated
For Internal Use
One Year Electronic Warranty

ORDERING INFORMATION

Finish	Order #
Antique Brass	SL910AB
Bright Brass	SL910BB
Oil Rubbed Bronze	SL910OIL
Satin Nickel	SL910SN

FEATURES

Electronic deadbolt lock
Battery powered (4-AA Alkaline)
Up to six unique user codes
Disposable (one-time use) code capable
Customizable programming code
Auto-locking function
LED illumination
Key override
Visual and audible confirmations
Remote compatible (up to 5 remotes, sold separately)

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
 Length: 5 1/2"
 Width: 3 1/8"
 Depth: 1 3/16"
Interior Dimensions:
 Length: 7 1/4"
 Width: 2 3/4"
 Depth: 1 3/4"
Door Thickness: 1 3/8" to 2"
Material: Stainless steel
Deadbolt: Adjustable backset deadbolt
Cylinder: 5 pin Schlage keyway
Power: 4 AA Alkaline batteries
Keys Included: 2
Weather Resistant Exterior Lock Body
Inside Lock Body for Interior Use Only
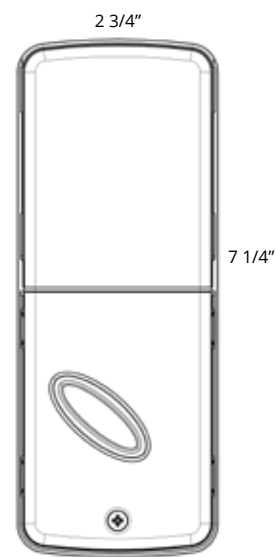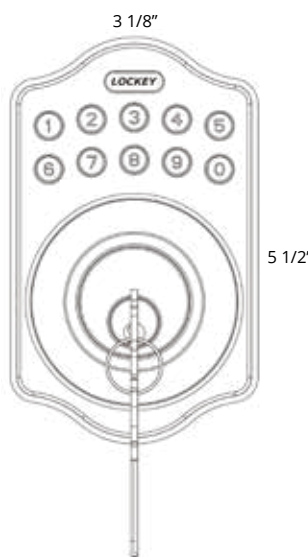
ORDERING INFORMATION

Finish	Order #
Antique Brass	E910AB
Bright Brass	E910BB
Satin Chrome	E910SC
Satin Nickel	E910SN
Antique Bronze	E910ABZ

FEATURES

Electronic knob lock
Adjustable latch backset
Battery powered (4-AA Alkaline)
Up to six unique user codes
Disposable (one-time use) code capable
Auto-locking function
LED illumination
Key override
Visual and audible confirmations
Remote compatible (up to 5 remotes, sold separately)

OPTIONS

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
Length: 5 1/2"
Width: 3 1/8"
Depth: 1 3/16"
Interior Dimensions:
Length: 7 1/4"
Width: 2 3/4"
Depth: 1 3/4"
Door Thickness: 1 3/8" to 1 3/4"
**Material:** Stainless steel
Latch: Adjustable
Cylinder: 5 pin Schlage keyway
Power: 4 AA Alkaline batteries
Keys Included: 2
Weather Resistant Exterior Lock Body
Inside Lock Body for Interior Use Only

ORDERING INFORMATION

Finish	Order #
Antique Brass	E930AB
Bright Brass	E930BB
Satin Chrome	E930SC
Satin Nickel	E930SN
Antique Bronze	E930ABZ

LOCKEY USA

FEATURES

Electronic lever lock
Adjustable latch backset
Battery powered (4 AA Alkaline)
Up to six unique user codes
Disposable (one-time use) code capable
Auto-locking function
LED illumination
Key override
Visual and audible confirmations
Remote compatible (up to 5 remotes, sold separately)

OPTIONS

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
        Length: 5 1/2"
        Width: 3 1/8"
        Depth: 1 3/16"
Interior Dimensions:
        Length: 7 1/4"
        Width: 2 3/4"
        Depth: 1 3/4"
Door Thickness: 1 3/8" to 1 3/4"
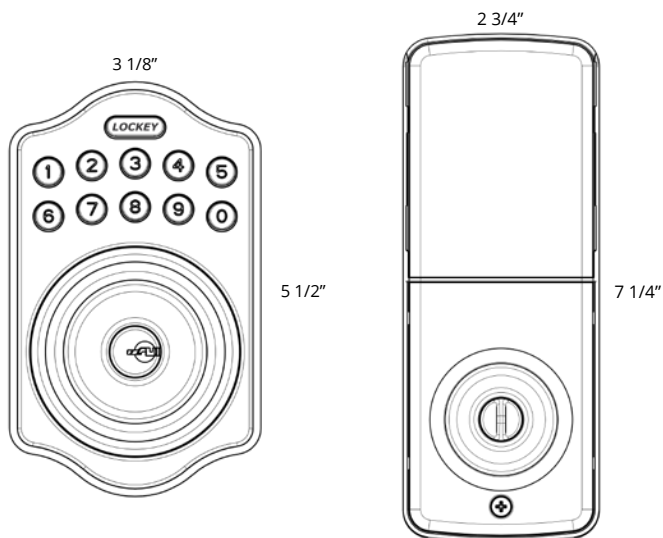**Material:** Stainless steel
Latch: Adjustable
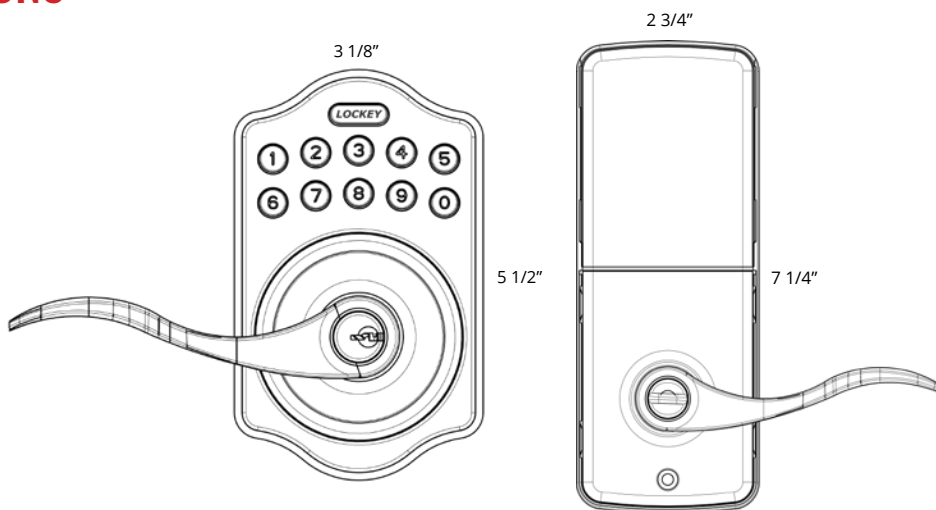**Cylinder:** 5 pin Schlage keyway
Power: 4 AA Alkaline batteries
Keys Included: 2
Weather Resistant Exterior Lock Body
Inside Lock Body for Interior Use Only

3 1/8"

2 3/4"

5 1/2"

7 1/4"

ORDERING INFORMATION

Finish	Order #
Antique Brass	E985AB
Bright Brass	E985BB
Satin Chrome	E985SC
Satin Nickel	E985SN
Antique Bronze	E985ABZ

FEATURES

Mechanical, keyless, surface mount deadbolt
Reversible long/short bar
One user code
Low profile
Ideal for light-duty applications
Compatible with:
C-25 Pull Handle (sold separately)
C-25 Pull Handle not available in BB or MG

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 3/4"
Interior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 3/8"
Throw: 3/4"
Door Thickness: 1 1/8" to 2"
Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

ORDERING INFORMATION

Finish	Order #
Antique Brass	C120AB
Bright Brass	C120BB
Jet Black	C120JB
Marine Grade	C120MG
Oil Rubbed Bronze	C120OIL
Satin Chrome	C120SC
Satin Nickel	C120SN
White	C120WH

LOCKEY USA

FEATURES

Mechanical, keyless, hook bolt
Surface mount lock
One user code
Low profile
Ideal for sliding glass doors
Compatible with:
C-25 Pull Handle (sold separately)
C-25 Pull Handle not available in BB or MG

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 3/4"
Interior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 1/2"
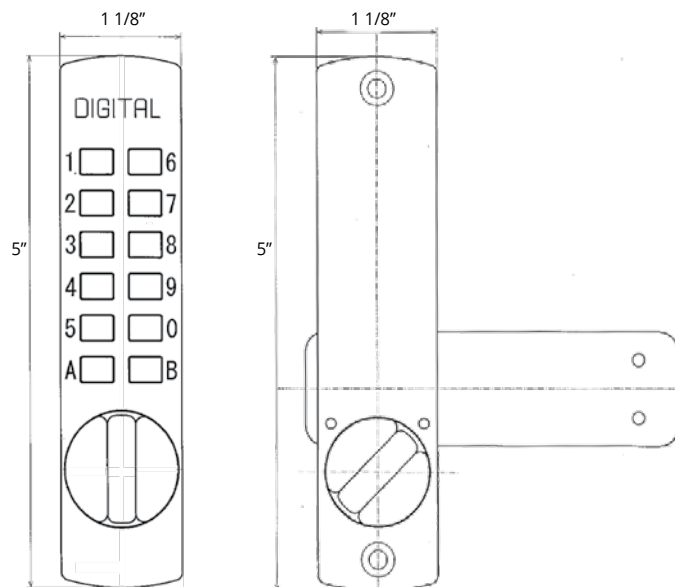**Throw:** 3/8"
Door Thickness: 1 1/8" to 2"
Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

ORDERING INFORMATION

Finish	Order #
Antique Brass	C150AB
Bright Brass	C150BB
Jet Black	C150JB
Marine Grade	C150MG
Oil Rubbed Bronze	C150OIL
Satin Chrome	C150SC
Satin Nickel	C150SN
White	C150WH

FEATURES

Mechanical, keyless, push button lock
Surface mount cam lock
Ideal for cabinet doors
One user code
Low profile
Compatible with:
C-25 Pull Handle (sold separately)
C-25 Pull Handle not available in BB or MG

DIMENSIONS & SPECIFICATIONS

Exterior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 3/4"
Interior Dimensions:
    Length: 5"
    Width: 1 1/8"
    Depth: 1 1/4"
Door Thickness: 1 1/8" to 2"
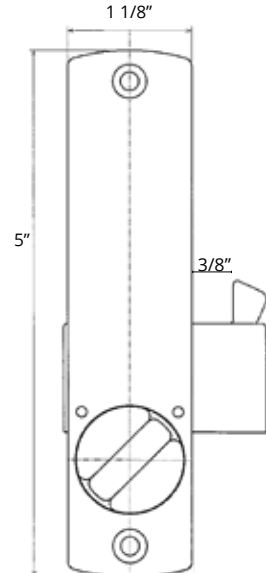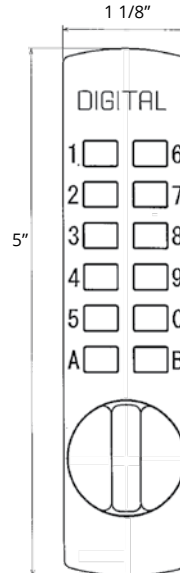Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
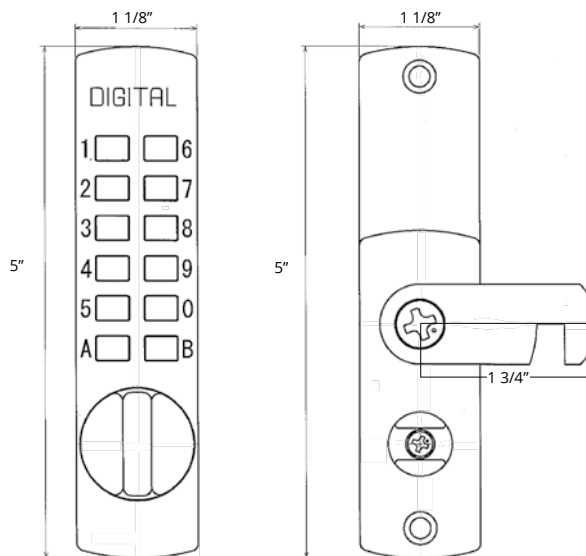
ORDERING INFORMATION

Finish	Order #
Antique Brass	C170AB
Bright Brass	C170BB
Jet Black	C170JB
Oil Rubbed Bronze	C170OB
Satin Chrome	C170SC
Satin Nickel	C170SN
White	C170WH

FEATURES

Mechanical cam lock
4 Wheel Combination
10,000 possible combinations
Key override
Code Finding Feature
  - 10 Disc barrel with shutter cap
  - Allows emergency access if code is lost
Code Changing Function
  - Accessible in unlocked position
Easy Installation

OPTIONS

Finishes:
Black (B)
Silver (S)
Custom*

DIMENSIONS & SPECIFICATIONS

Dimensions: 56mm x 28mm
Nut fixing: 3/4" - 27 UN x 21mm long (16.5mm A/F)
Cam fixing: 8mm Sq. with M4 thread
Material: Zinc die-cast construction
Finish: Powder coated
Keys Included: 2

ORDERING INFORMATION

Finish	Order #
Black	MC728B
Silver	MC728S

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Mechanical cam lock
4 Wheel Combination Lock
10,000 possible combinations
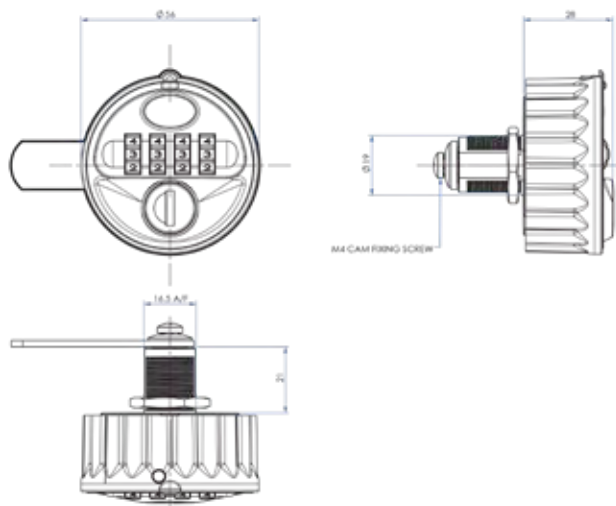Can be flush fitted or surface mounted
Emergency Key Override (7 Disc Barrel)
Code Finding Feature (7 Disc Barrel)
Code Change Function
Code Finding Feature
  - 7 Disc Barrel
  - Allows emergency access if code is lost
Secured with 2 x M4 Pan Head Screws

OPTIONS

Finishes:	Keypad Direction:
Black (B)	Vertical (V)
Silver (S)	Right Handed Horizontal (R)
White (W)	Left Handed Horizontal (L)*
Custom*	

DIMENSIONS & SPECIFICATIONS

Dimensions:
Body Length: 94mm (3.7")
Head Depth: 32mm (1 1/4")
Material: Zinc Alloy and ABS Construction
Finish: Powder coated
Keys Included: 2
For Internal Use
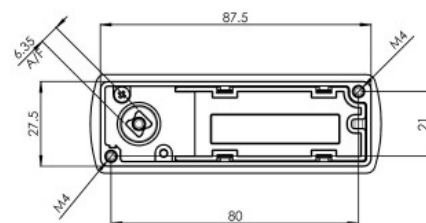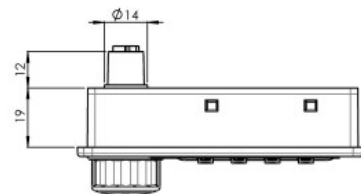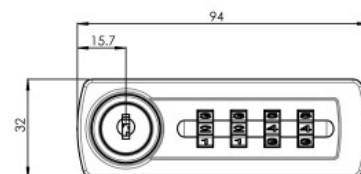
Flush Fit Clamp Box

Surface Mount Sleeve

ORDERING INFORMATION

Finish	Vertical	Right
Black	GM270VB	GM270RB
Silver	GM270VS	GM270RS
White	GM270VW	GM270RW

*Contact LockeyUSA for minimum order quantities and lead times for custom orders.

FEATURES

Mechanical, keyless deadbolt lock
Installs in minutes with EZ plates
One user code
Thumbturn on interior and exterior
Changeable handing
Adjustable deadbolt backset
Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination (DC)

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
   Length: 4 7/8"
   Width: 1 1/2"
   Depth: 1 3/4"
Total Coverage with Trim Plates: 5 5/8" L x 2 1/2" W
Backset: Adjustable
Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit
Door Prep Edge Bore: 1"
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
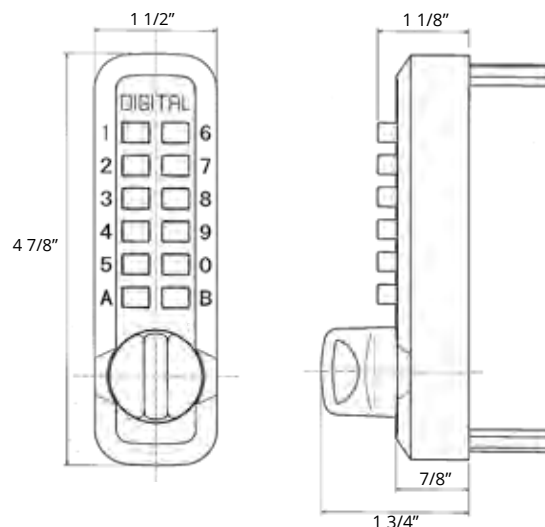
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	M210AB	M210ABDC
Bright Brass	M210BB	M210BBDC
Bright Chrome	M210BC	M210BCDC
Jet Black	M210JB	M210JBDC
Marine Grade	M210MG	M210MGDC
Oil Rubbed Bronze	M210OB	M210OBDC
Satin Chrome	M210SC	M210SCDC
Satin Nickel	M210SN	M210SNDC
White	M210WH	M210WHDC

FEATURES

Mechanical, keyless deadbolt
Surface/Rim mount
One user code
Thumb turn on exterior and interior
Changeable handing
Reversible long/short bar
Ideal for narrow stile doors & cabinets
Deadbolt throws 3/4"
Works on most hinged doors

OPTIONS

Finishes:
Antique Brass
Bright Brass
Jet Black
Marine Grade
Satin Chrome
Satin Nickel
White

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 4 7/8"
Width: 1 1/2"
Depth: 1 3/4"
Long Throw Bar: 2 1/4"
Short Throw Bar: 7/8"
Door Thickness: 1 1/8" to 2"
Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

ORDERING INFORMATION

Finish	Order #
Antique Brass	M220AB
Bright Brass	M220BB
Jet Black	M220JB
Marine Grade	M220MG
Satin Chrome	M220SC
Satin Nickel	M220SN
White	M220WH

FEATURES

Mechanical, keyless deadlocking spring latch lock
Automatically locks when door is closed
One user code
Knob on exterior, thumbturn on interior
Changeable handing
Adjustable backset latch
Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination (DC)

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
  Length: 4 7/8"
  Width: 1 1/2"
  Depth: 1 7/8"
Total Coverage with Trim Plates: 5 5/8" x 2 1/2"
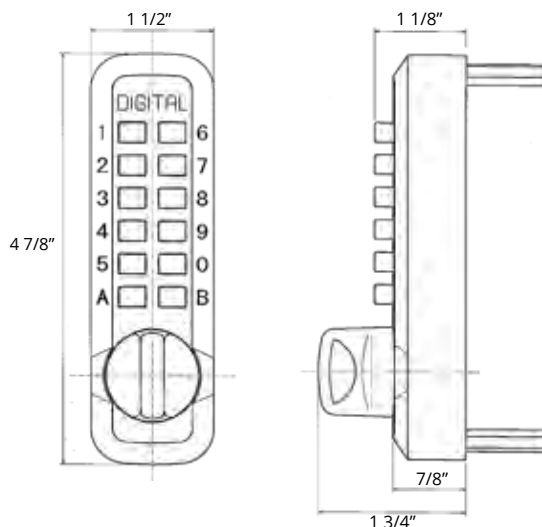**Door Thickness:** 1 3/8" to 2"
Door Prep Edge Bore: 1"
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

1 1/2"

4 7/8"

1 7/8"
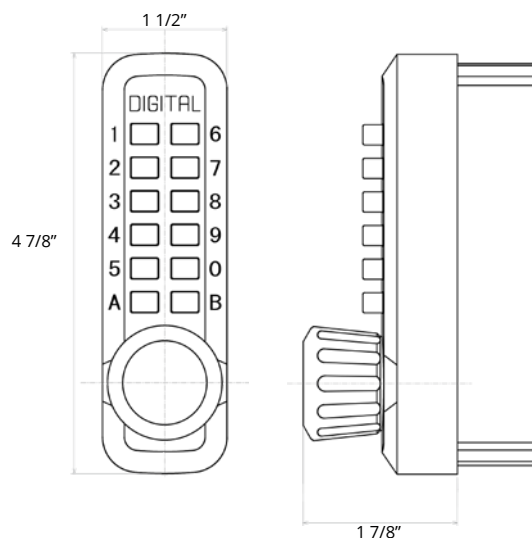
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	M230AB	M230ABDC
Bright Brass	M230BB	M230BBDC
Bright Chrome	M230BC	M230BCDC
Jet Black	M230JB	M230JBDC
Marine Grade	M230MG	M230MGDC
Oil Rubbed Bronze	M230OB	M230OBDC
Satin Chrome	M230SC	M230SCDC
Satin Nickel	M230SN	M230SNDC
White	M230WH	M230WHDC

FEATURES

Mechanical, keyless, push button lock
Option of lever handle or knob
Heavy-duty handles
Passage function
Changeable handing
Adjustable backset latch
Magnet-proof

OPTIONS

| Lever | Knob | Lever | Knob |
| Single Combination | Single Combination | Double Combination | Double Combination |

DIMENSIONS & SPECIFICATIONS

Dimensions with lever:
Length: 7 5/16"
Width: 2 3/16"
Depth: 2 3/8"
Lever Size: 5" W x 5/8" H
Dimensions with knob:
Length: 7 5/16"
Width: 2 3/16"
Depth: 2 13/16"
Backset: Adjustable
Material: Zinc-plated steel
Teflon coated stainless steel interior components
Door Thickness: 1 1/8" to 2"
Up to 5" thick door with an Extension Kit (sold separately)
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
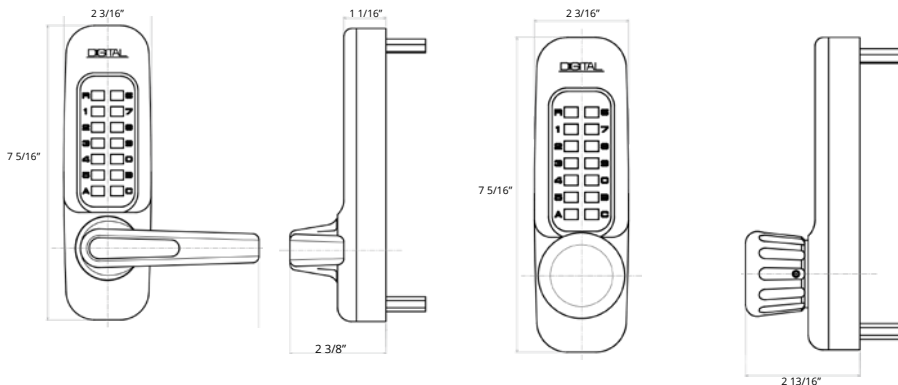
ORDERING INFORMATION

Finish	Lever	Knob	Lever Double Combination	Knob Double Combination
Jet Black	1150JB	1600JB	1150JBDC	1600JBDC
Marine Grade	1150MG	1600MG	1150MGDC	1600MGDC
Oil Rubbed Bronze	1150OB	1600OB	1150OBDC	1600OBDC

FEATURES

Mechanical, keyless surface/rim mount deadbolt
One user code
Knob on exterior, thumb turn on interior
Changeable handing
Long and short bar included
Ideal for narrow stile doors & cabinets
Deadbolt throws 3/4"

OPTIONS

Key Override

Single Combination   Key Override

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 1 5/8"
Total Coverage with Trim Plates: 6" L x 2 1/2" W
Door Thickness: 1 1/8" to 2"
Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
Long Throw Bar: 2 1/4"
Short Throw Bar: 7/8"
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

ORDERING INFORMATION

Finish	Single Combination	Key Override
Antique Brass	2200AB	2200ABKO
Bright Brass	2200BB	2200BBKO
Jet Black	2200JB	2200JBKO
Satin Chrome	2200SC	2200SCKO
Satin Nickel	2200SN	2200SNKO
White	2200WH	2200WHKO

FEATURES

Mechanical, keyless deadbolt lock
One user code
Knob on exterior, thumb turn on interior
Changeable handing
Adjustable deadbolt backset
Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination (DC)
Key Override

| Single Combination | Double Combination | Key Override |

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 1 5/8"
Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
Backset: Adjustable
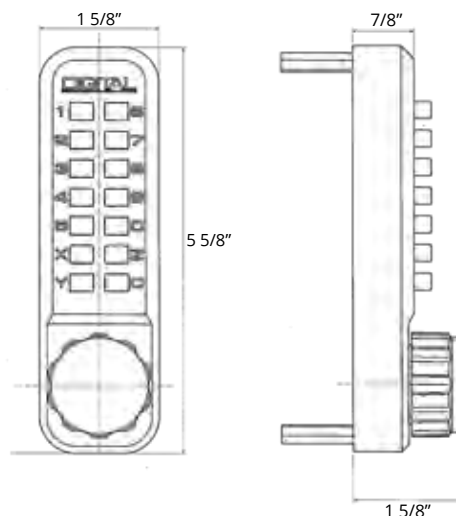**Door Thickness:** 1 3/16" to 2", up to 5" with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
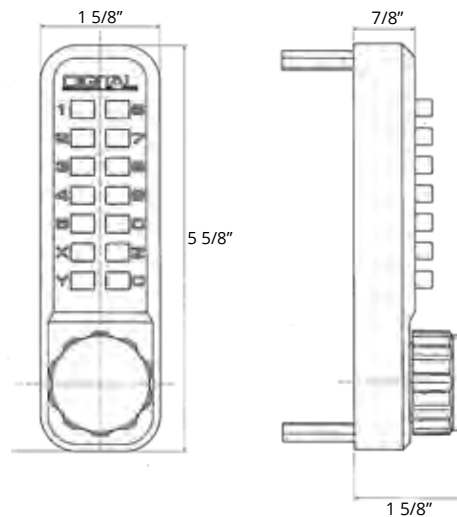
ORDERING INFORMATION

Finish	Single Combination	Double Combination	Key Override	Double Combination, Key Override
Antique Brass	2210AB	2210ABDC	2210ABKO	2210ABDCKO
Bright Brass	2210BB	2210BBDC	2210BBKO	2210BBDCKO
Bright Chrome	2210BC	2210BCDC	2210BCKO	2210BCDCKO
Jet Black	2210JB	2210JBDC	2210JBKO	2210JBDCKO
Marine Grade	2210MG	2210MGDC	2210MGKO	2210MGDCKO
Oil Rubbed Bronze	2210OB	2210OBDC	2210OBKO	2210OBDCKO
Satin Chrome	2210SC	2210SCDC	2210SCKO	2210SCDCKO
Satin Nickel	2210SN	2210SNDC	2210SNKO	2210SNDCKO
White	2210WH	2210WHDC	2210WHKO	2210WHDCKO

FEATURES

Mechanical, keyless hook bolt lock
One user code
Knob on exterior, thumb turn on interior
Changeable handing
Ideal for sliding doors and gates
3/8" throw
Oversized knob available

OPTIONS

Key Override

Single Combination   Key Override

DIMENSIONS & SPECIFICATIONS

Dimensions:
  Length: 5 5/8"
  Width: 1 5/8"
  Depth: 1 5/8"
Throw: 3/8"
Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
Door Thickness: 1 1/8" to 2"
Fits doors 1/8" thick and up with Thin Door Kit
Fits doors up to 5" thick with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
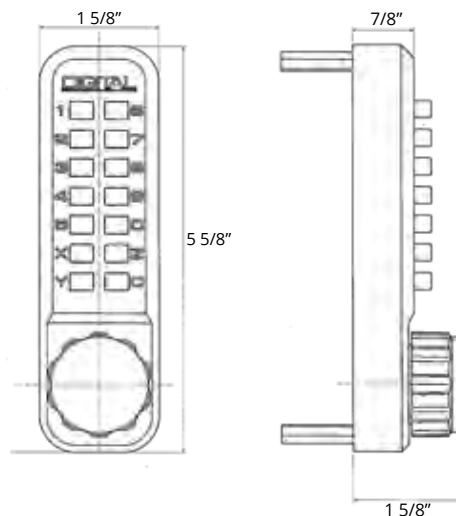
ORDERING INFORMATION

Finish	Single Combination	Key Override
Antique Brass	2500AB	2500ABKO
Bright Brass	2500BB	2500BBKO
Jet Black	2500JB	2500JBKO
Satin Chrome	2500SC	2500SCKO
Satin Nickel	2500SN	2500SNKO
White	2500WH	2500WHKO

FEATURES

Mechanical, keyless lock with one user code
Replaces 2230
Knob on exterior and interior
Auto-locking with passage function
Reversible handing
Adjustable latch
Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
    Length: 5 5/8"
    Width: 1 5/8"
    Depth: 2 1/4"
Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
Backset: Adjustable
**Door Thickness:** 1 3/16" to 2", up to 5" with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

1 5/8"

5 5/8"

2 1/4"
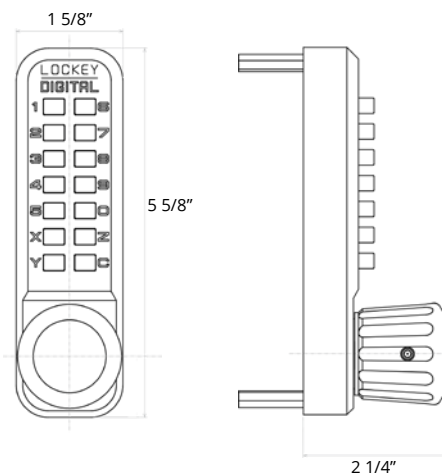
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2830AB	2830ABDC
Bright Brass	2830BB	2830BBDC
Bright Chrome	2830BC	2830BCDC
Jet Black	2830JB	2830JBDC
Marine Grade	2830MG	2830MGDC
Oil Rubbed Bronze	2830OB	2830OBDC
Satin Chrome	2830SC	2830SCDC
Satin Nickel	2830SN	2830SNDC
White	2830WH	2830WHDC

FEATURES

Mechanical, keyless lever lock with one user code
Lever handle on exterior and interior
Auto-locking with passage function
Reversible handing
ADA Compliant
Adjustable latch
Covers standard 2 1/8" hole

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 2 1/4"
Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
ADA Lever Size: 4" W x 1" H
Backset: Adjustable
Door Thickness: 1 3/16" to 2", up to 5" with Extension Kit
**Material:** Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

1 5/8"   7/8"

5 5/8"

2 1/4"
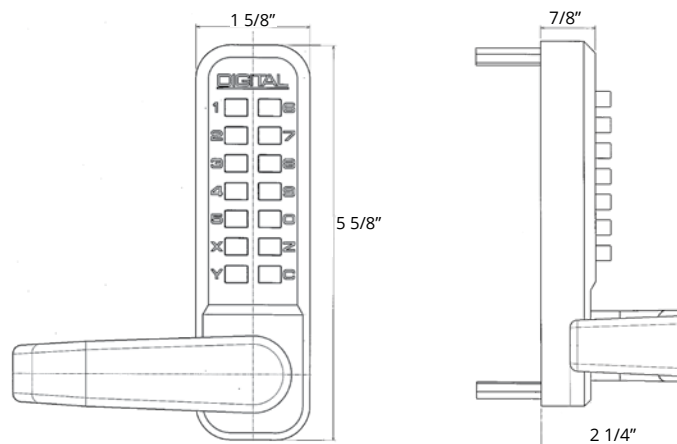
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2835AB	2835ABDC
Bright Brass	2835BB	2835BBDC
Bright Chrome	2835BC	2835BCDC
Jet Black	2835JB	2835JBDC
Marine Grade	2835MG	2835MGDC
Oil Rubbed Bronze	2835OB	2835OBDC
Satin Chrome	2835SC	2835SCDC
Satin Nickel	2835SN	2835SNDC
White	2835WH	2835WHDC

FEATURES

Add-on key override system (KOS)
Compatible with 2000 and 2900 series locks
Schlage keyway
Available keyed alike or keyed different
Three keys included
KOS and lock sold separately (KOS shown below)

COMPATIBLE WITH

2000 SERIES:	2900 SERIES:
2200	2900
2210	2900DC
2210DC	2930
2500	2930DC
2830	2950
2830DC	2950DC
2835	2985
2835DC	2985DC

DIMENSIONS & SPECIFICATIONS

KOS Dimensions:
   Length: 8 1/16"
   Width: 2 1/2"
   Depth: 2"
Dimensions with 2835 & KOS 2835 Installed:
   Length: 8 1/16"
   Width: 2 1/2"
   Depth: 2 3/4"
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Material: Aluminum
Reversible Handing
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
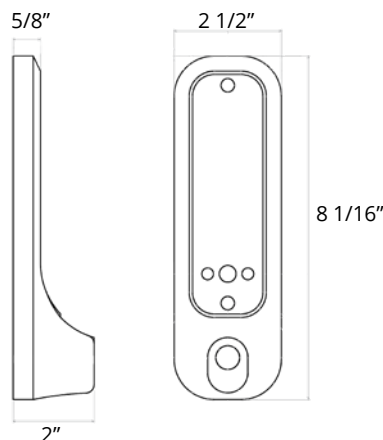
5/8"   2 1/2"   8 1/16"   2"

ORDERING INFORMATION

Finish	2835/2985 KOS	KOS
Antique Brass	KOS2835AB	KOS-AB
Jet Black	KOS2835JB	KOS-JB
Marine Grade	KOS2835MG	KOS-MG
Oil Rubbed Bronze	KOS2835OB	KOS-OB
Satin Chrome	KOS2835SC	KOS-SC
Satin Nickel	KOS2835SN	KOS-SN
White	KOS2835WH	KOS-WH

FEATURES

Mechanical, keyless, narrow stile deadbolt lock
Replaces Adams-Rite style lock
One user code
Knob on exterior, thumb turn on interior
Changeable handing
1 1/8" backset
Ideal for gates and aluminum storefront doors

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 1 5/8"
Total Coverage with Trim Plates: 6" L x 2" W
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
Five-ply laminated steel bolt
Concealed hardened steel pin for maximum security
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
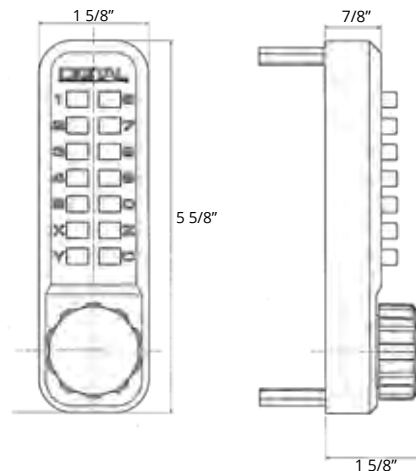
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2900AB	2900ABDC
Bright Brass	2900BB	2900BBDC
Bright Chrome	2900BC	2900BCDC
Jet Black	2900JB	2900JBDC
Marine Grade	2900MG	2900MGDC
Oil Rubbed Bronze	2900OIL	2900OILDC
Satin Chrome	2900SC	2900SCDC
Satin Nickel	2900SN	2900SNDC
White	2900WH	2900WHDC

FEATURES

Mechanical, keyless, narrow stile lock
Replaces Adams-Rite style lock
Locks automatically, now with passage function
One user code
Knob on exterior, thumb turn on interior
Changeable handing
Ideal for aluminum storefront doors

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
   Length: 5 5/8"
   Width: 1 5/8"
   Depth: 1 5/8"
Total Coverage with Trim Plates: 6" L x 2" W
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Backset: 1 1/8"
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
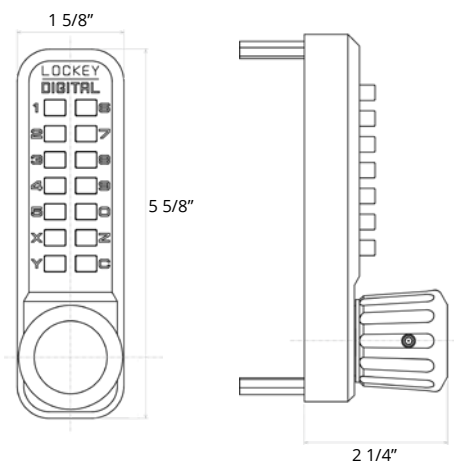
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2930AB	2930ABDC
Bright Brass	2930BB	2930BBDC
Bright Chrome	2930BC	2930BCDC
Jet Black	2930JB	2930JBDC
Marine Grade	2930MG	2930MGDC
Oil Rubbed Bronze	2930OIL	2930OBDC
Satin Chrome	2930SC	2930SCDC
Satin Nickel	2930SN	2930SNDC
White	2930WH	2930WHDC

FEATURES

Mechanical, keyless, narrow stile hook bolt lock
Replaces Adams-Rite style lock
One user code
Knob on exterior, thumb turn on interior
Changeable handing
1 1/8" backset
Ideal for sliding gates & aluminum storefront doors

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 1 5/8"
Throw Size: 1 1/2"
Total Coverage with Trim Plates: 6" L x 2" W
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Five-ply laminated steel bolt
Concealed hardened steel pin for maximum security
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty
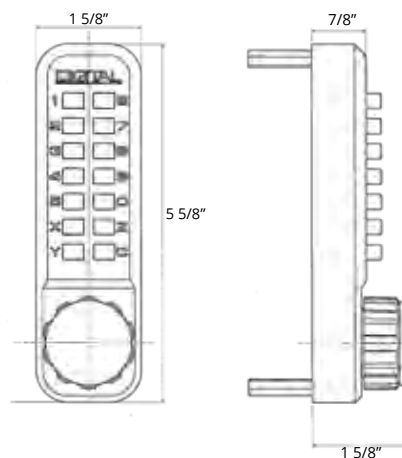
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2950AB	2950ABDC
Bright Brass	2950BB	2950BBDC
Bright Chrome	2950BC	2950BCDC
Jet Black	2950JB	2950JBDC
Marine Grade	2950MG	2950MGDC
Oil Rubbed Bronze	2950OIL	2950OILDC
Satin Chrome	2950SC	2950SCDC
Satin Nickel	2950SN	2950SNDC
White	2950WH	2950WHDC

FEATURES

Mechanical, keyless, narrow stile lever handle lock
Locks automatically (with passage function)
Replaces Adams-Rite style lock
One user code
Lever on exterior and interior
Changeable handing
1 1/8" backset
Ideal for aluminum storefront doors

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 5 5/8"
Width: 1 5/8"
Depth: 2 1/4"
Total Coverage with Trim Plates: 6 1/2" L x 2 1/2" W
**Door Thickness:** 1 1/8" to 2", up to 5" with Extension Kit
Backset: 1 1/8"
Material: Zinc-plated steel
Teflon coated stainless steel interior components
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

1 5/8"   7/8"

5 5/8"

2 1/4"
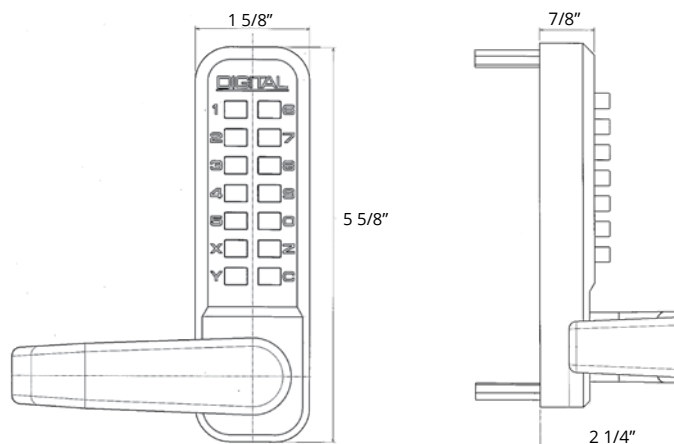
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Antique Brass	2985AB	2985ABDC
Bright Brass	2985BB	2985BBDC
Bright Chrome	2985BC	2985BCDC
Jet Black	2985JB	2985JBDC
Marine Grade	2985MG	2985MGDC
Oil Rubbed Bronze	2985OIL	2985OILDC
Satin Chrome	2985SC	2985SCDC
Satin Nickel	2985SN	2985SNDC
White	2985WH	2985WHDC

FEATURES

Mechanical, keyless deadbolt lock
One user code
Oversized knob on exterior and interior
Reversible handing
Adjustable backset deadbolt
Covers standard 2 1/8" hole
Marine Grade Finish

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
 Length: 6 1/4"
 Width: 1 3/4"
 Depth: 2"
Total Coverage with Trim Plates: 6 3/4" L x 2 1/4" W x 2 1/8" D
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
**Material:** Zinc-plated steel
Teflon coated stainless steel interior components
Teflon coated with Marine Grade Finish
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

The 3210 is only available in Marine Grade finish. The finish closely resembles the color of a Satin Chrome (26D) finish lock. We recommend the Marine Grade Finish for saltwater environments where the lock will sustain consistent exposure to the elements. It has a much longer lifetime than a standard finish and provides added strength against the corrosive elements of coastal/saltwater environments.
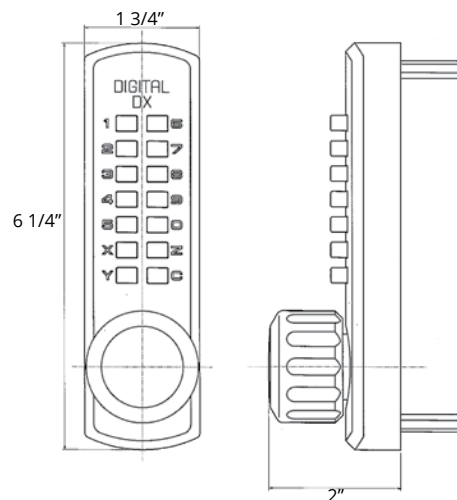
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Marine Grade	3210	3210DC

FEATURES

Mechanical, keyless deadlocking spring latch
One user code
Oversized knob on exterior and interior
Reversible handing
Adjustable backset
Covers standard 2 1/8" hole
Marine Grade Finish

OPTIONS

Single Combination, Double Combination

Single Combination   Double Combination

DIMENSIONS & SPECIFICATIONS

Dimensions:
    Length: 6 1/4"
    Width: 1 3/4"
    Depth: 2"
Total Coverage with Trim Plates: 6 3/4" L x 2 1/4" W x 2 1/8" D
Door Thickness: 1 1/8" to 2", up to 5" with Extension Kit
Material: Zinc-plated steel
Teflon coated stainless steel interior components
Teflon coated with Marine Grade Finish
For Exterior & Interior Use
Weather Resistant
Lifetime Mechanical Warranty

The 3230 is only available in Marine Grade finish. The finish closely resembles the color of a Satin Chrome (26D) finish lock. We recommend the Marine Grade Finish for saltwater environments where the lock will sustain consistent exposure to the elements. It has a much longer lifetime than a standard finish and provides added strength against the corrosive elements of coastal/saltwater environments.
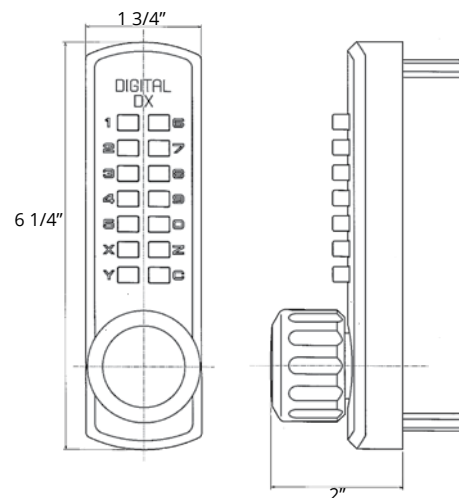
ORDERING INFORMATION

Finish	Single Combination	Double Combination
Marine Grade	3230	3230DC

COMBO-CORK BOTTLE LOCK

The Lockey USA Combo Cork Bottle Lock is the perfect solution to securing fine wines and liquors. Simply set the combination, twist the top and rest assured that your bottles are secured.

Ideal for childproofing wine & liquor bottles
Fits most wine & liquor bottles
Easy to change combination

Order Number:
BOT-LOC

KEYLESS KEY SAFE BOX

Secure solution to control access to keys
Suitable for both indoor and outdoor use
Easy to change combination

Dimensions:
Box Size: 2" W x 5 1/2" H x 2 1/2" D
Box Inside: 1 9/16" W x 5" H x 5/8" D

Finish	Order Number:
Jet Black	KEYBOXJB
Marine Grade	KEYBOXMG
Satin Nickel	KEYBOXSN
White	KEYBOXWH

MS-40 COMBINATION SLIDE BOLT

The MS-40 Combination Slide Bolt is ideal for equipping a variety of applications with keyless access.

Recommended uses include:
Gates
Sheds
Cabinets

Dimensions:
Slide Bolt Dimensions: 3 1/2" W x 1 15/16" H
Receiver Dimensions: 7/8" W x 1 15/16" H

Order Number:
MS-40

GB200M

Steel or Aluminum

Compatible Locks:
M210
M230

Order Numbers:
Steel: GB200M
Aluminum: GB200MAL

GB210

Steel or Aluminum

Compatible Locks:
M210-- designed for use
with a knob or lever

Order Numbers:
Steel: GB210
Aluminum: GB210AL

GB900

Steel (Powder-Coated Black)
or Aluminum

Compatible Locks:
2930
2985

Order Numbers:
Steel: GB900
Aluminum: GB900AL

GB950

Steel (Powder-Coated Black)
or Aluminum

Compatible Locks:
2900
2950

Order Numbers:
Steel: GB950
Aluminum: GB950AL

GB1150

Steel or Aluminum

Compatible Locks:
1150
1600

Order Numbers:
Steel: GB1150
Aluminum: GB1150AL

GB2500

Steel or Aluminum

Compatible Locks:
2210   3210
2830   3230
2835

Order Numbers:
Steel: GB2500
Aluminum: GB2500AL

GB-ADD-A-BOLT

Steel, Powder-Coated, Black or White
Drive-In Deadbolt, designed for gates
with stiles 1 1/2" to 2"

Compatible Locks:
M210, M210DC

Order Numbers:
Black: GB-ADD-A-BOLT-B
White: GB-ADD-A-BOLT-W

GB2900-LINX

Stainless Steel Box for Chain Link
Compatible Locks:
2900
2930
2950
2985
Order Number:
GB2900-LINX
GB2900-LINX 1 7/8"

PANIC SHIELDS
NO MOUNTING HOLES

24":
Black: PS-24-B
Silver: PS-24-S
Steel: PS-24-PL

12":
Black: PS-12-B
Silver: PS-12-S
Steel: PS-12-PL

Mounting plate for any panic bar
Turn gates into emergency exits
16ga electro-galvanized steel
Adjustable for 28"-54" gates
Available in 24" and 12"
Black & Silver: Powder-Coated finish
Steel: Unfinished

PREDRILLED PANIC SHIELDS
FOR LOCKEY PANIC BARS

24":
Black: PS-1124-B
Silver: PS-1124-S
Steel: PS-1124-PL

12":
Black: PS-1112-B
Silver: PS-1112-S
Steel: PS-1112-PL

PREDRILLED PANIC SHIELDS
FOR DETEX PANIC BARS

24":
Black: PS-DX24-B
Silver: PS-DX24-S
Steel: PS-DX24-PL

12":
Black: PS-DX12-B
Silver: PS-DX12-S
Steel: PS-DX12-PL

EDGE PANIC SHIELDS
*AVAILABLE PREDRILLED FOR
PB1100, PB2500, or DETEX V40*
Order #
PS-EDGE-B
PS-EDGE-S
(Specify panic bar hole pattern)

EDGE Mounting Plate
Turn gates into emergency exits
16ga electro-galvanized steel
Adjustable for 28"-54" gates
Available in 24" and 12"
Available in Black or Silver
Powder-Coated finish

MAX GUARD

Mounts above panic bar
Prevents tampering from outside the gate
16ga electro-galvanized steel
4" protrusion, 24" wide

Order Numbers:
Powder-Coated Black: PS-MAX-B
Powder-Coated Silver: PS-MAX-S
Steel: PS-MAX-PL

LATCH PROTECTOR

Provides extra security to gate latches
For gates with over 1" gap
16ga electro-galvanized steel
Powder-Coated finish
23.375" long

Order Numbers:
Black: PS-LP-B
Silver: PS-LP-S

PANIC SHIELD EXTENSION PLATES

Extends panic shield up to 74"
16ga electro-galvanized steel
Available in 24" or 12"
Black & Silver: Powder-Coated
Steel: No finish

24":
Black: PS-EXT-B
Silver: PS-EXT-S
Steel: PS-EXT-PL

12":
Black: PS-EXT12-B
Silver: PS-EXT12-S
Steel: PS-EXT12-PL

STRIKE BRACKETS

1/4" Steel, Powder-Coated
Adjustable
Fits up to 3" post
Available in Black or Silver

Order Numbers:
Black: PS-SB-B
Silver: PS-SB-S

Available LOCKEY Panic Bars:
Standard: PB1100
Aluminum: PB1100 AL
Stainless Steel: PB1100 SS
Fire Rated: PB1100 FR

For 48" Doors: PB1142
Stainless Steel, for 48" Doors: PB1142 SS

LOCKEY PANIC BARS

Grade 1 Certified ANSI/BHMA A156.3 Series
Complies with ANSI A117.a ADA requirements
UL/cUL Listed
Narrow Stile: 2 1/2"
Door Thickness: 1 3/4" (standard)
Device Length: 33" for 36" doors or 42" for 48" doors
Can be cut down to 27"
Weather Resistant

36" Doors	48" Doors
PB1100 AL	PB1142
PB1100 SS	PB1142 SS
PB1100 FR	

The PB2500 and PB2500 Alarm Bar
have a patented double-interlocking
system, making it virtually impossible to
tamper with, pry, or force open.

PB2500 PANIC BARS

UL Certified ANSI/BHMA 156.3 2008, Grade 1
Listed by CA State Fire Marshall & ADA Compliant
Made in the USA
Weather Resistant
Non-handed
Standard lengths for 36" or 48" doors/gates
Can be field cut for undersized doors/gates
Designed for narrow stile aluminum doors

36" Doors	48" Doors
PB2500	PB2542
PB2500 Alarm	PB2542 Alarm

Available DETEX Panic Bars:
Detex V-40
Detex Alarm Bar: V-40xEB
Detex Weatherized Alarm Bar: V-40xEBxW

DETEX PANIC BARS

ANSI and BHMA Grade 1 Certified
UL/cUL Listed
ADA Compliant
Narrow Stile: 2 1/2"
Door Thickness: 1 3/4" (standard)
Device Length: 33" for 36" doors or 42" for 48" doors
Field-sizable
Weatherproof

Order #	Black	48" Doors
V-40	711	48
V-40xEB		
V-40xEBxW		

KEYLESS PANIC TRIMS

115P HEAVY-DUTY LEVER

Keyless Panic Trim, 1150 lock body

Compatible with panic bars that accept a flat tail piece & have a turn radius of **74 degrees or less**

Order #
115P
Please specify finish: JB, MG, or OB

160P HEAVY-DUTY KNOB

Keyless Panic Trim, 1600 lock body

Compatible with panic bars that accept a flat tail piece & have a turn radius of **90 degrees or less**

Order #
160P
Please specify finish: JB, MG, or OB

285P LEVER

Keyless Panic Trim, 2835 lock body

Compatible with panic bars that accept a flat tail piece & have a turn radius of 74 degrees or less

Order #
285P
Please specify finish: AB, BB, BC, JB, MG, OB, SC, SN or WH

310P KNOB

Keyless Panic Trim, 3000 series lock body

Compatible with panic bars that accept a flat tail piece & have a turn radius of **90 degrees or less**

Order #
310P
Only available in MG finish

PANIC TRIMS

PULL HANDLE ENTRY TRIM

Order #
PB-DUMED

LEVER HANDLE CLUTCH TRIM

Order #
PB-LHCL

LEVER HANDLE KEYED TRIMS

Style	Order #
Keyed Entry	PB-LHED
Storeroom	PB-LHSR

LEVER HANDLE PASSAGE TRIM

Order #
PB-LHPS

NIGHT LATCH HANDLESET TRIM

Order #
PB-NLED

THUMBPIECE KEYED ENTRY TRIM

Order #
PB-TPED

PANIC SHIELD GATE BOXES

PSGB100

Trim box

Compatible locks:
115P
160P

Finish	Order #
Black	PSGB100B
Silver	PSGB100S

PSGB200

Trim box

Compatible locks:
285P
310P

Finish	Order #
Black	PSGB200B
Silver	PSGB200S

PSGB-LH

Trim box

Compatible trims:
PB-LHPS
PB-LHED
PB-LHSR

Order #
PSGBLH

INCLUDES

Panic Shield
Panic Bar (36")
Strike Bracket

OPTIONS

Panic Shield:
Lockey, Detex, or Edge pre-drilled panic shield
Height: 24" or 12"
Finish: Plain (unfinished steel), Black, or Silver

Panic Bar:
Lockey PB1100, PB2500, PB2500 Alarm, or
Detex V40 Series

Strike Bracket:
Black or Silver

12" Panic Shield with PB1100

24" Panic Shield with PB1100

DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:
    Height: 24" or 12"
    Width: Expandable up to 54"
Material: 16-Gauge electro-galvanized steel
Finish: Powder-coated black or silver
Panic Bar Sizing:
    Length: 33" for 36" doors, 42" for 48" doors
    Field-sizable: Can be cut down to 27"

ORDERING INFORMATION

Order #:
PS-11 Value
PS-11 EDGE Value
PS-DX Value
PS-DX EDGE Value
PS-2500EDGE Value

Alarm Bar Order #'s:
PS-DX-Alarm-Value
PS-DX-Alarm-EDGE-Value
PS-2500-Alarm-EDGE-Value

Please specify size & finish for all products included in the panic shield kit.

INCLUDES

Panic Shield
Panic Bar (36")
Strike Bracket
PSGB-5 Key Box
Keyed Cylinder

OPTIONS

Panic Shield:
Lockey, Detex, or Edge pre-drilled panic shield
Height: 24" or 12"
Finish: Plain (unfinished steel), Black, or Silver
Panic Bar:
Lockey PB1100, PB2500, PB2500 Alarm, or
Detex V40 Series
Strike Bracket:
Black or Silver
Key Box:
Black or Silver

DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:
        Height: 24" or 12"
        Width: Expandable up to 54"
Material: 16-Gauge electro-galvanized steel
Finish: Powder-coated black or silver
Panic Bar Sizing:
        Length: 33" for 36" doors, 42" for 48" doors
        Field-sizable: Can be cut down to 27"

12" Panic Shield with PB1100

24" Panic Shield with PB1100

ORDERING INFORMATION

Order #:	Alarm Bar Order #'s:
PS-11 Safety	PS-DX-Alarm-Safety
PS-11 EDGE Safety	PS-DX-Alarm-EDGE-Safety
PS-DX Safety	PS-2500-Alarm-EDGE-Safety
PS-DX EDGE Safety	
PS-2500EDGE Safety	*Please specify size & finish for all products included in the panic shield kit.*

INCLUDES

Panic Shield, Panic Bar (36"), 285-P Panic Trim, PSGB200 Keyless Trim Box, Strike Bracket, Max Guard
*Edge Security Kits also include Latch Protector

OPTIONS

Panic Shield:
Lockey, Detex, or Edge pre-drilled panic shield
Height: 24" or 12"
Finish: Plain (unfinished steel), Black, or Silver
Panic Bar:
Lockey PB1100, PB2500, PB2500 Alarm, or
Detex V40 Series
Keyless Panic Trim:
Finish: AB, BB, BC, JB, MG, OB, SC (standard), SN, WH
Strike Bracket:
Black or Silver
Keyless Trim Box:
Black or Silver
Max Guard:
Plain, Black, or Silver

DIMENSIONS & SPECIFICATIONS

Panic Shield Dimensions:
   Height: 24" or 12"
   Width: Expandable up to 54"
Material: 16-Gauge electro-galvanized steel
Finish: Powder-coated black or silver, or raw steel
Panic Bar Sizing:
   Length: 33" for 36" doors, 42" for 48" doors
   Field-sizable: Can be cut down to 27"

ORDERING INFORMATION

Order #:

PS-11 Security
PS-11 EDGE Security
PS-DX Security
PS-DX EDGE Security
PS-2500EDGE Security

Alarm Bar Order #:

PS-DX-Alarm-Security
PS-DX-Alarm-EDGE-Security
PS-2500-Alarm-EDGE-Security

Please specify size & finish for all products included in the panic shield kit.

PS-11 EDGE KITS:

✓ **NEW EDGE PANIC SHIELD MOVES THE LOCKEYUSA PB1100 PANIC BAR CLOSER TO THE STRIKE**

✓ **REDUCED STRIKE SIZE & REDUCED STRIKE PROTRUSION**

✓ **LATCH PROTECTOR INCLUDED WITH ALL PS-11 EDGE KITS**

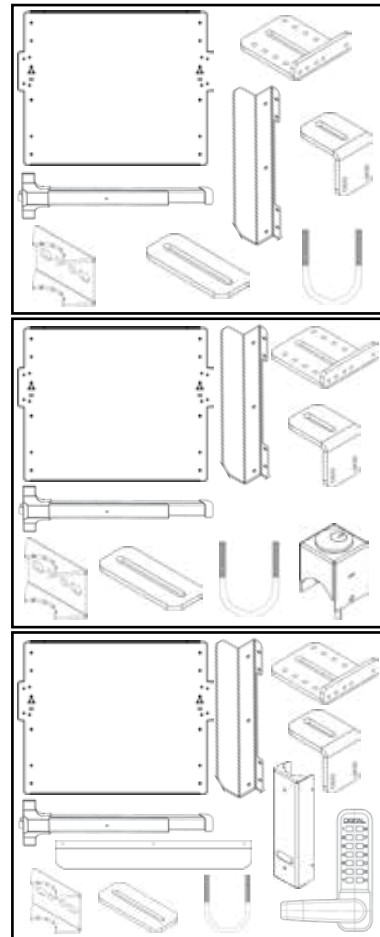**PS-11EDGE** vs. **PS-1124**

PS-11 EDGE VALUE KITS INCLUDE:
✓ EDGE PANIC SHIELD
✓ LOCKEY PB1100 PANIC BAR (36")
✓ STRIKE BRACKET
✓ LATCH PROTECTOR
✓ GATE STOP

PS-11 EDGE SAFETY KITS INCLUDE:
✓ EDGE PANIC SHIELD
✓ LOCKEY PB1100 PANIC BAR (36")
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB-5 KEY BOX
✓ KEYED CYLINDER
✓ LATCH PROTECTOR
✓ GATE STOP

PS-11 EDGE SECURITY KITS INCLUDE:
✓ EDGE PANIC SHIELD
✓ LOCKEY PB1100 PANIC BAR (36")
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB200 KEYLESS TRIM BOX
✓ 285-P KEYLESS PANIC TRIM
✓ MAX GUARD
✓ LATCH PROTECTOR
✓ GATE STOP

PS-2500 EDGE KITS:

✓ FEATURES NEW PB2500 PANIC BAR

*The **PB2500** has a patented interlock latch & strike. The latch rotates to engage and grip the specially designed strike. In addition to the latch and strike, an interlocking mechanism located within the chassis offers a double interlocking system, making the PB2500 Panic Bar **virtually impossible to tamper with, pry, or force open.***

✓ REDUCED STRIKE SIZE & REDUCED STRIKE PROTRUSION

✓ LATCH PROTECTOR INCLUDED WITH ALL PS-2500 EDGE KITS
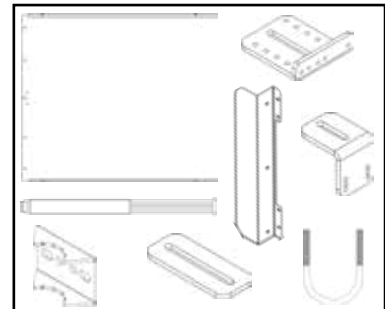
PS-2500 EDGE VALUE KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR PB2500
✓ LOCKEY PB2500 PANIC BAR
✓ STRIKE BRACKET
✓ LATCH PROTECTOR
✓ GATE STOP

PS-2500 EDGE SAFETY KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR PB2500
✓ LOCKEY PB2500 PANIC BAR
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB-5 KEY BOX
✓ KEYED CYLINDER
✓ LATCH PROTECTOR
✓ GATE STOP

PS-2500 EDGE SECURITY KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR PB2500
✓ LOCKEY PB2500 PANIC BAR
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB200 KEYLESS TRIM BOX
✓ 285-P KEYLESS PANIC TRIM
✓ MAX GUARD
✓ LATCH PROTECTOR
✓ GATE STOP
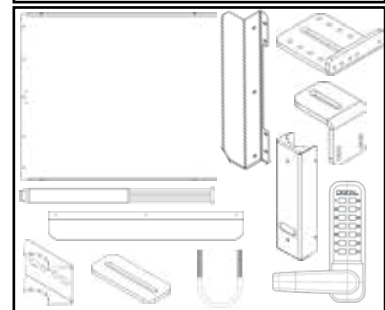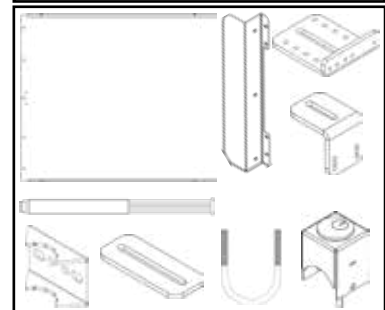
PS-DXEDGE   vs. **PS-DX24**

PS-DX EDGE KITS:

✓ **NEW PS-DX EDGE PANIC SHIELD BRINGS DETEX V-40 PANIC BAR CLOSER TO THE STRIKE**

✓ **REDUCED STRIKE SIZE & REDUCED STRIKE PROTRUSION**

✓ **LATCH PROTECTOR INCLUDED WITH ALL PS-DX EDGE KITS**

PS-DX EDGE VALUE KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR DETEX V-40
✓ DETEX V-40 PANIC BAR
✓ STRIKE BRACKET
✓ LATCH PROTECTOR
✓ GATE STOP

PS-DX EDGE SAFETY KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR DETEX V-40
✓ DETEX V-40 PANIC BAR
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB-5 KEY BOX
✓ KEYED CYLINDER
✓ LATCH PROTECTOR
✓ GATE STOP

PS-DX EDGE SECURITY KITS INCLUDE:
✓ EDGE PANIC SHIELD PREDRILLED FOR DETEX V-40
✓ DETEX V-40 PANIC BAR
✓ EDGE-PS-SB STRIKE BRACKET
✓ EDGE-PSGB200 KEYLESS TRIM BOX
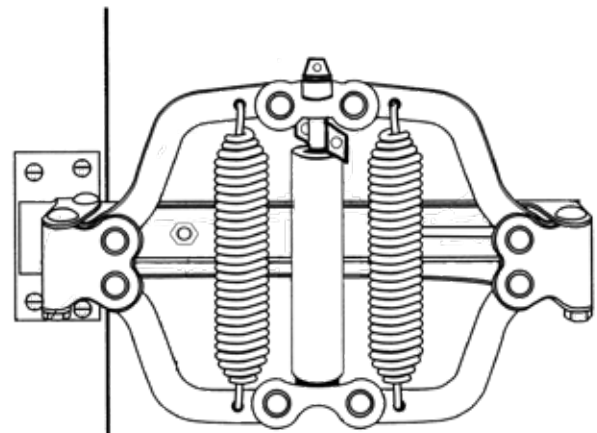✓ 285-P KEYLESS PANIC TRIM
✓ MAX GUARD
✓ LATCH PROTECTOR
✓ GATE STOP
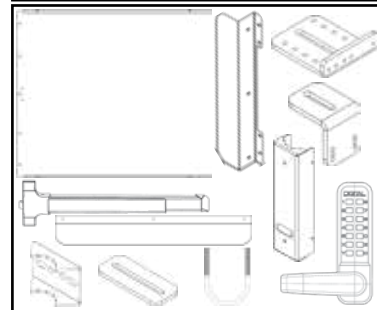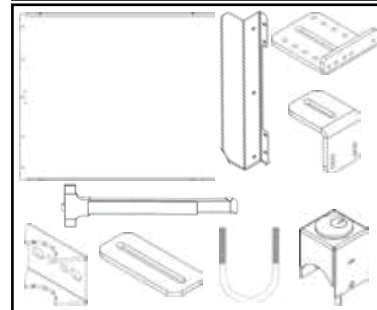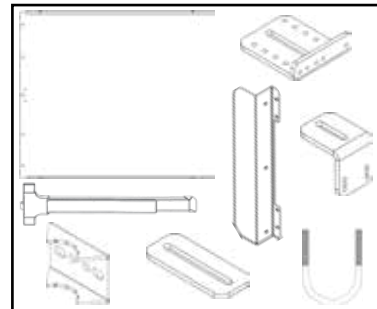
FEATURES

Gently closes both small and large gates up to 125lbs.
Pushes gate closed
Adjustable closing speed
Can be installed on top, bottom or middle of gate
Recommended for pool, garden and barrier gates
Can be used on lightweight (non fire-rated) doors
Works best on gates with in-line/flush hinges

13"

7 1/2"

DIMENSIONS & SPECIFICATIONS

Dimensions:
 Length: 7 1/2"
 Width: 13"
 Depth: 2 1/2"
Mounting Bracket Dimensions: 3 1/4" x 1 3/4"
Max. Gate Weight: 125 lbs.
Max. Gate Width: 54"
Max. Opening Angle: 90 degrees
Min. Operating Temperature: 10 degrees
Max. Operating Temperature: 110 degrees
Type of Gate Material: Vinyl, Wood, Steel, Chain Link
Closing/Latching Method: Hydraulic
Material: Steel
Finish: Powder-Coated
Color: Black
Hinge Arrangements: In-line/flush hinges
Opening Pressure: Variable, depending on gate size

The LockeyUSA Turtle Back TB100 Hydraulic Gate closer must mount on the hinge side/pull side of the gate in order to push the gate closed. The TB100 works best if the gate has in-line/flush hinges flush with the gate post with 1" or less gap.

ORDERING INFORMATION

Order #: TB100

LOCKEY USA
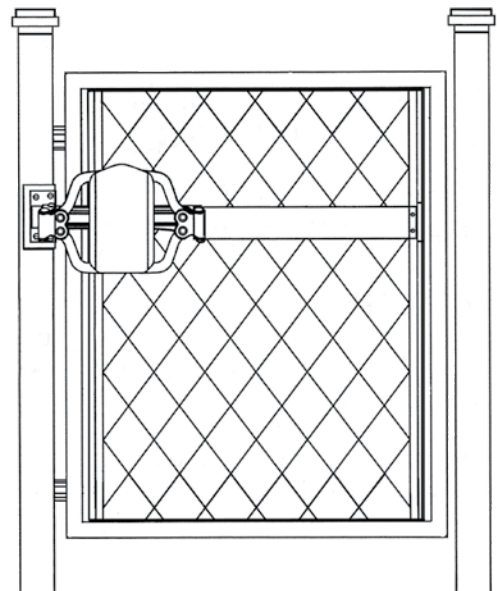
FEATURES

Flush mount gate closer
Closes gates 50 to 125 lbs. easily and gently
Installs on top/middle/bottom
Works with left and right hand gates
Will work with most in-line hinge arrangements
Mounts on opening side of gate
Pushes the gate closed
Adjustable closing speed
Adjustable latching speed
Hold open feature

OPTIONS

Black, White

DIMENSIONS & SPECIFICATIONS

Dimensions:
Length: 12 1/2"
Width: 2 1/2"
Depth: 2 3/8"
Max. Gate Weight: 125 lbs.
Max. Gate Width: 54"
Max. Opening Angle: 90 degrees
Type of Gate Material: Metal, Vinyl, Wood
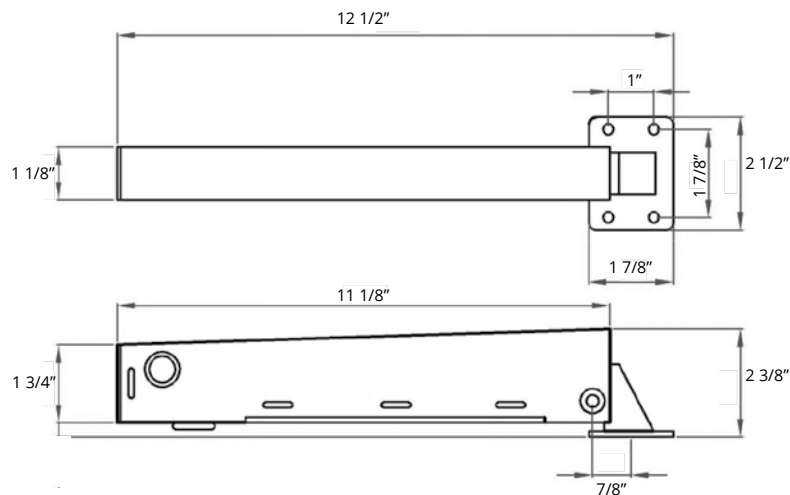**Closing/Latching:** Adjustable
Material: Steel
Color: Black or White
Finish: Powder coated
Hinge Arrangements: In-line
Opening Pressure: Variable depending on gate size

The TB175 may not be compatible with offset hinge arrangements or arrangements that create more than 2" between gate post and gate, as it is critical to mount the closer as close as possible to the gate's pivot point.

ORDERING INFORMATION

Finish	Order #:
Black	TB175B
White	TB175W

FEATURES

Closes small and large gates from 50-125 lbs.
Hydraulic/Nitrogen Gas controlled closing speed
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
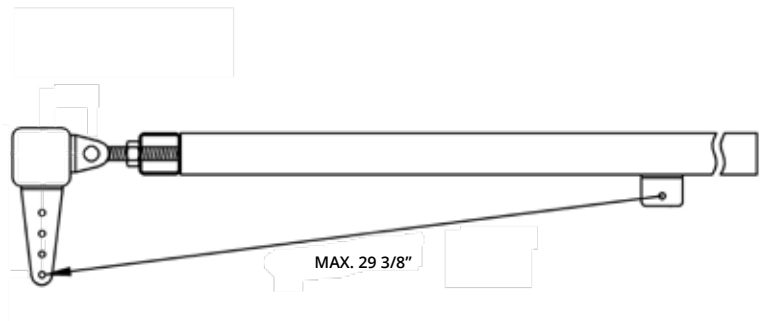Not compatible with gates less than 30 inches wide

OPTIONS

Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

Gate Weight: 50-125 lbs.
Max. Gate Width: 36-52"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel or Stainless Steel
Color: TB200: Black, TB200SS: Silver
Finish: TB200: Painted, TB200SS: Stainless Steel
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 3-7 lbs.

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB200 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*

MAX. 29 3/8"

ORDERING INFORMATION

Material, Color	Order #:
Steel, Black	TB200
Stainless Steel, Silver	TB200SS

FEATURES

Closes small and large gates from 75-175 lbs.
Hydraulic/Nitrogen Gas controlled closing speed
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
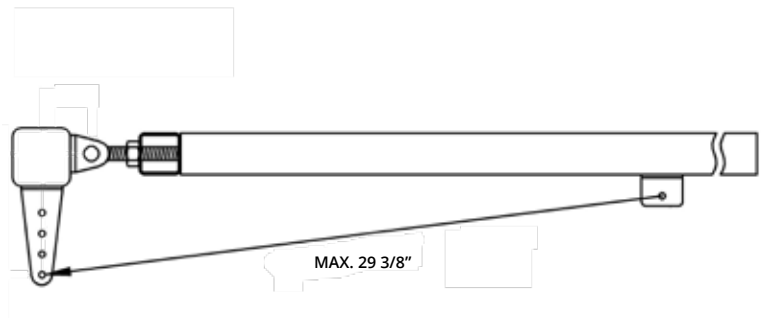Not compatible with gates less than 30 inches wide

OPTIONS

Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

Gate Weight: 75-175 lbs.
Gate Width: 40-64"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel or Stainless Steel
Color: TB400: Black, TB400SS: Silver
Finish: TB400: Painted, TB400SS: Stainless Steel
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 6-12 lbs.

MAX. 29 3/8"

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB400 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*

ORDERING INFORMATION

Material, Color	Order #:
Steel, Black	TB400
Stainless Steel, Silver	TB400SS

FEATURES

Closes small and large gates from 150-250 lbs.
Hydraulic/Nitrogen Gas controlled closing speed
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
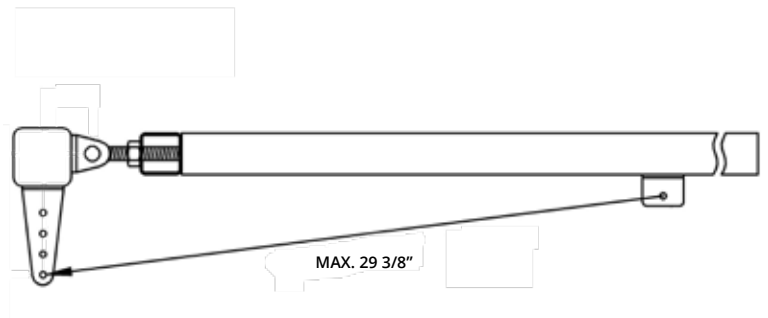Not compatible with gates less than 30 inches wide

OPTIONS

Steel (Black), Stainless Steel (Silver)

DIMENSIONS & SPECIFICATIONS

Gate Weight: 150-250 lbs.
Gate Width: 44-72"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel or Stainless Steel
Color: TB600: Black, TB600SS: Silver
Finish: TB600: Painted, TB600SS: Stainless Steel
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 8-18 lbs.

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB600 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*

MAX. 29 3/8"

ORDERING INFORMATION

Material, Color	Order #:
Steel, Black	TB600
Stainless Steel, Silver	TB600SS

FEATURES

Adjustable hydraulic (nitrogen gas) controlled closing speed
Closes small and large gates from 50-125 lbs.
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
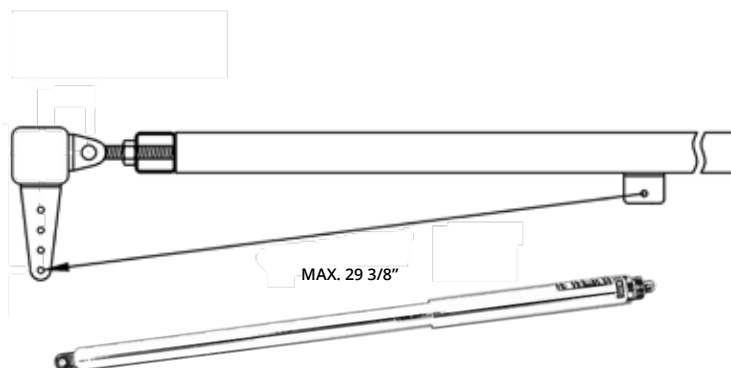Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

Gate Weight: 50-125 lbs.
Gate Width: 36-52"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel
Color: Black, White, or Gray
Finish: PVC wrapped
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 3-7 lbs.

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB250 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.

MAX. 29 3/8"

ORDERING INFORMATION

Finish	Order #:
TB250 Black	TB250B
TB250 White	TB250W
TB250 Gray	TB250G

FEATURES

Adjustable hydraulic (nitrogen gas) controlled closing speed
Closes small and large gates from 75-175 lbs.
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

Gate Weight: 75-175 lbs.
Gate Width: 40-64"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel
Color: Black, White, or Gray
Finish: PVC coated
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 6-12 lbs.

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB450 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*

MAX. 29 3/8"
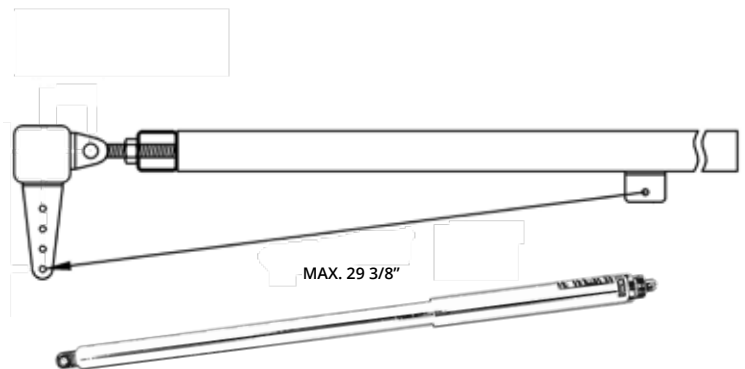
ORDERING INFORMATION

Finish	Order #:
TB450 Black	TB450B
TB450 White	TB450W
TB450 Gray	TB450G

FEATURES

Adjustable hydraulic (nitrogen gas) controlled closing speed
Closes small and large gates from 150-250 lbs.
Installs on top/middle/bottom
Works with left and right hand gates
Mounts on opening side of gate
Pushes the gate closed
Mounting brackets and fitting bar included
Not compatible with gates less than 30 inches wide

OPTIONS

Black, White, or Gray

DIMENSIONS & SPECIFICATIONS

Gate Weight: 150-250 lbs.
Gate Width: 44-72"
Max. Opening Angle: 100 degrees
Min. Operating Temperature: 15 degrees Fahrenheit*
Max. Operating Temperature: 122 degrees Fahrenheit*
Type of Gate Material: Vinyl, Steel, Wood, Chain Link**
Closing/Latch Method: Hydraulic/Nitrogen Gas
Material: Steel
Color: Black, White, or Gray
Finish: PVC coated
Hinge Arrangements: In-line or Offset
Opening Pressure: Approx. 8-18 lbs.

Operation of the closer in temperatures below or above the minimum and maximum operating temperatures may result in improper operation or complete failure of the closer.

**TB650 can be mounted on chain link gates with the TB-LINX. TB-LINX sold separately. TB-LINX shown to the right.*
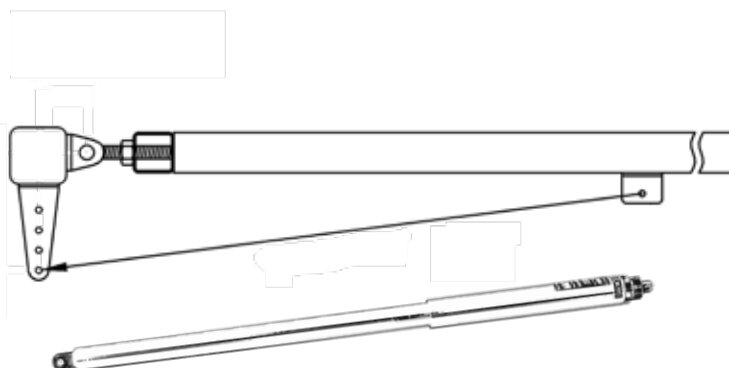
ORDERING INFORMATION

Finish	Order #:
TB650 Black	TB650B
TB650 White	TB650W
TB650 Gray	TB650G

FEATURES

All-in-one closer and hinge system
Self-closing
Concealed, high use, pedestrian gate closer
Tamper and vandal resistant
Two speed adjustments: closing & latching
Closes gates weighing between 50-250 lbs.
Works with left and right hand gates
No hold open
Restrictor to avoid over opening
Speed adjustments hidden from view
180 degree capable with 180 Drive Plate*
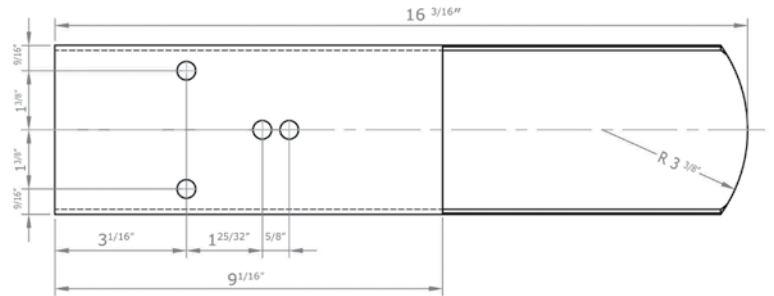
DIMENSIONS & SPECIFICATIONS

Max. Gate Weight: 50-250 lbs.
Max. Gate Width: 48"
Max. Gate Height: 78"
Max. Opening Angle: 90 degrees, 180 degrees with 180 Drive Plate*
Min. Operating Temperature: -40 degrees Fahrenheit
Max. Operating Temperature: 122 degrees Fahrenheit
Type of Gate Material: Ornamental, Chain Link**
Material: Steel
Finish: Electro-galvanized
Color: Gold

*180 Drive Plate sold separately
**Mounts on Chain Link with TB950-LINX (sold separately)

ORDERING INFORMATION

Order #:
TB950
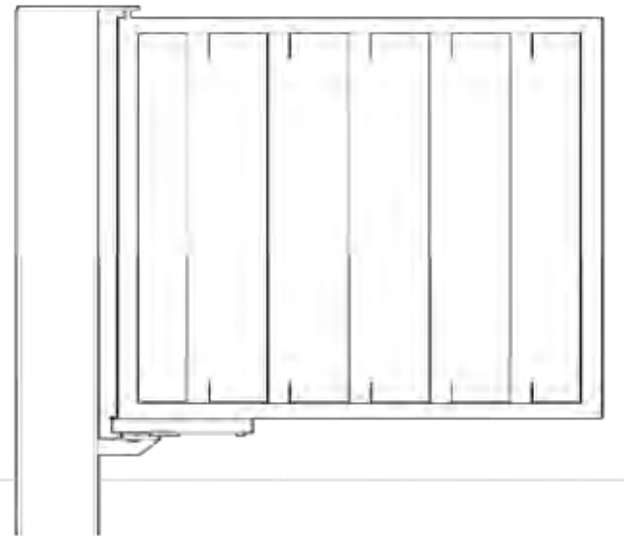
GB2900 LINX

Stainless Steel Gate Box
Lock sold separately
No welding required

Compatible with:
2900
2930
2950
2985

Post Size:	Order #:
1 5/8" (standard)	GB2900 LINX
1 7/8"	GB2900 LINX 1 7/8"

TB-LINX

Mounting kit for chain link gates
Compatible with:

TB200	TB250
TB400	TB450
TB600	TB650

Includes:
(1) Post-Bracket
(1) U-Bolt
(2) Machine Screws
(4) Lock Nuts

Post Size:	Order #:
2-3"	TB-LINX
4"	TB-LINX-4

TB-950 LINX

Mounting kit for chain link gates
Compatible with:
TB950

Includes:
(2) Post-Brackets
(2) U-Bolts
(2) Weldable Plates
(4) Lock Nuts

Post Size:	Order #:
2-3"	TB950-LINX

GATE HASP

✓ **A SIMPLE WAY TO LOCK TWIN GATES, WITHOUT THE UGLY CHAINS**

✓ **WORKS WITH MOST TWIN GATES**

The NEW Gate Hasp from LockeyUSA is designed to work with most double gates. Secure double driveway gates, pedestrian gates and most double saloon style swing gates.

✓ **SECURE WITH LOCKEYUSA 2950DC OR A PADLOCK**

The Gate Hasp can be locked into place with a combination hook bolt lock (2950DC) or a padlock.

OPTIONS

Hasp Size:
2.5" x 24"
3.5" x 24"

2950DC Lock Finish:
Antique Brass
Bright Brass
Bright Chrome
Jet Black
Marine Grade
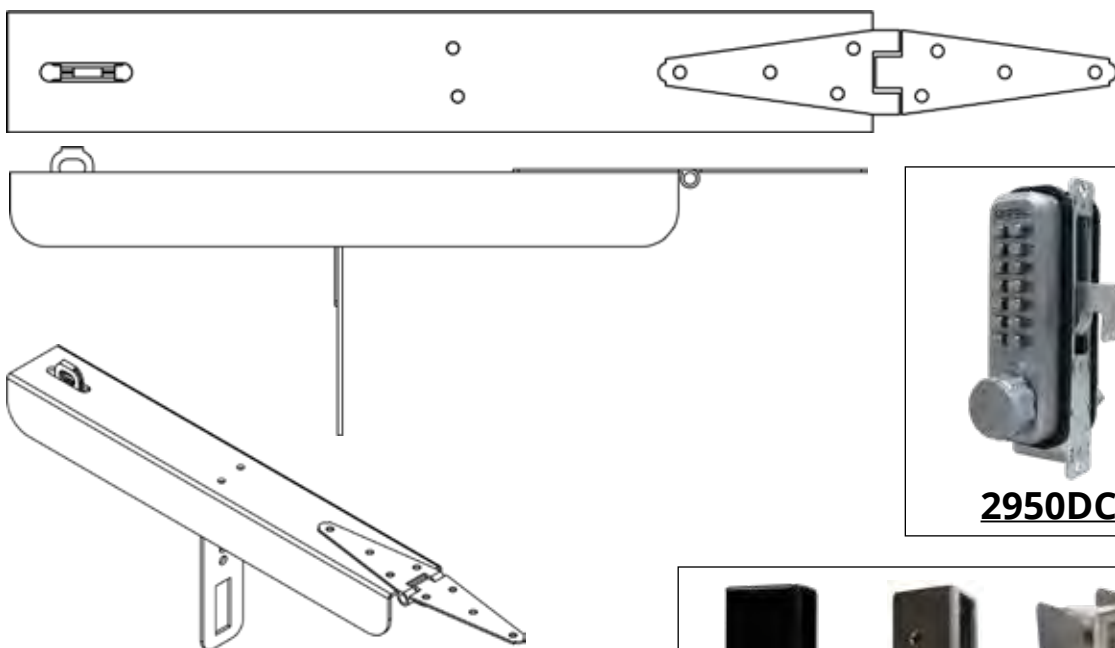Oil Rubbed Bronze
Satin Nickel
White

Gate Box:
GB900
GB900AL
GB2900-LINX

2950DC

Gate Box Options

ORDERING OPTIONS	2.5" x 24"	3.5" x 24"
Hasp Only	TGH-2524	TGH-3524
Hasp + 2950DC + GB900	TGH-DC2524	TGH-DC3524
Hasp + 2950DC + GB900 AL	TGH-DC2524-AL	TGH-DC3524-AL
Hasp + 2950DC + LINX	TGH-LINX-2524	TGH-LINX-3524

Accessory Name:	Compatible With:	Part #:
EC Series Key Blanks	EC Series	ECKeyBlank
EC Series Extension Kit	EC Series	ECExtKit
Numbered Trim Plate	EC Series	ECTrim
Batteries (24pk)	EC Series	Battery
Slam Latch	EC780, EC782, EC783	ECSlam
RFID Master Card	EC783, EC785	ECRFIDM
RFID User Card	EC783, EC785	ECRFIDU
ADA Lever Wet Area Kit	EC781	ECWetKit
E-Digital Remote Control	E-Digital Series (E910, E930, E985)	E-Remote
C-Series Pull Handle	C Series	C-25
Extra Combination Tumblers	C, M, 1000, 2000, 2900, 3000, & P Series	Pin Kit
Tamper Proof Screws	C, M, 1000, 2000, 2900 & 3000 Series	TPS
Extension Kit-1150	1150, 1600 (New Style)	EXT-1150
Extension Kit-2000	C Series, M Series, 2200, 2210, 2500, 2900, 2950 & 3000 Series	EXT-2000
Extension Kit-2835	2830, 2835, 2930 (New Style), 2985	EXT-2835
Thin Door Kit	C Series, M220, 2200, 2500	TDK
Adjustable Deadbolt	M210, 2210 & 3210	D-ADJ
Adjustable Latch	M230, 2230, 1600, 3230	SK2000-ADJ
Adjustable Latch 1150	1150	SL1150-ADJ
Adjustable Latch 2830/2835	2830, 2835	SL2835-ADJ
Drive-in Deadbolt	M210, 2210 & 3210	DID
M213 Surface Mount Latch	M Series	M213
900 Deadbolt	2900	900-Bolt
930 Latch	2930, 2985	930-Latch
950 Hookbolt	2950	950-Hook
3" x 8 1/2" Cover Plate	1150, 1600	T-Cover 1150
3 1/4" x 9" Cover Plate	2000 & 3000 Series	T-Cover 2500
Metal Trim Plate	2000 Series	T-Metal
Oversized Knob	2200, 2210, 2230, 2500, 2900, 2950	OSK
Push/Pull Guard	2000 Series, 3000 Series & 310P	PPG
Narrow Stile Mounting Tabs	2900 Series	AR-2991-0965
Keyed Rim Cylinder	PSGB-5 Key Box (1 1/8" Schlage 5 pin)	PS-CYL-(KA/KD)
IC Core Cylinder	Panic Bars (1 1/8" Rim Cylinder IC Core)	PS-CYL-IC
Mortise Cylinder	PB2500, PB Keyed Trims & V40 Alarm (1 1/8" Schlage C 5 pin)	V-CYL
Key Box	Keyed Rim Cylinder	PSGB-5
Medium Duty Gate Stop	TB Gate Closers	GS-90MD
Heavy Duty Gate Stop	TB Gate Closers	GS-90HD
2-3" Chain Link Gate Stop	TB Gate Closers	GS-LINX
4" Chain Link Gate Stop	TB Gate Closers	GS-LINX4"
TB Bracket Kit	TB Gate Closers	TB-Bracket-Kit
TB Mounting Kit	TB Gate Closers	TB-Mounting-Kit
TB Pin Kit	TB Gate Closers	TB-Pin-Kit
TB950 180 Drive Plate	TB950	TB950Plate 180 Drive

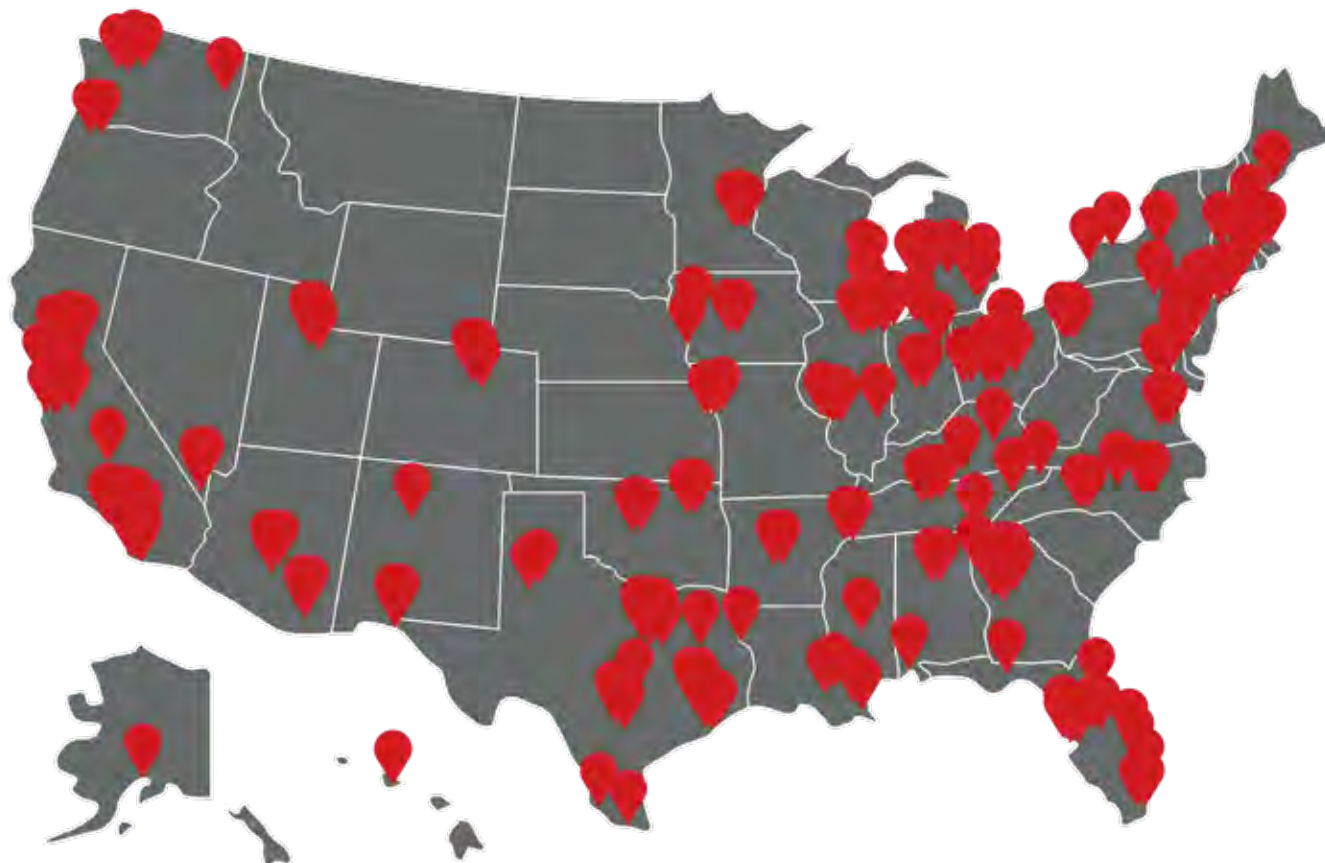*For replacement parts and accessories, visit www.LockeyParts.com. LockeyParts.com ONLY sells replacement parts & accessories. Lockey USA products must be purchased from an authorized distributor/online retailer.*

LOCKEY USA

4245 S. LINCOLN RD.
MT. PLEASANT, MI 48858

LOCKEY USA

TEL: 888.395.0163
WWW.LOCKEYUSA.COM